

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 734 132 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
14.12.2005 Bulletin 2005/50

(51) Int Cl.⁷: **H04L 5/06**, H04L 5/02,
H04L 27/26

(21) Application number: **96104617.4**

(22) Date of filing: **22.03.1996**

(54) Signal structure for multicarrier modulation, which reduces the overhead requirement

Signalaufbau für Mehrträgermodulation, der den Bedarf an Zusatzkapazität zur Verwaltung vermindert

Structure de signal pour modulation multiporteuse, réduisant le besoin de capacité additionnelle

(84) Designated Contracting States:
DE FR GB NL

(30) Priority: **23.03.1995 JP 6386995**

(43) Date of publication of application:
25.09.1996 Bulletin 1996/39

(73) Proprietor: **KABUSHIKI KAISHA TOSHIBA**
Kawasaki-shi, Kanagawa 212-8572 (JP)

(72) Inventors:

- **Seki, Takashi, c/o Intellectual Property Division Tokyo 105 (JP)**
- **Taga, Noboru, c/o Intellectual Property Division Tokyo 105 (JP)**
- **Okita, Shigeru, c/o Intellectual Property Division Tokyo 105 (JP)**

• **Ishikawa, Tatsuya, c/o Intellectual Property Div. Tokyo 105 (JP)**

(74) Representative: **Henkel, Feiler & Hänzel**
Möhlstrasse 37
81675 München (DE)

(56) References cited:
WO-A-90/04893 WO-A-95/07581

- **BOSSERT M ET AL: "CHANNEL ESTIMATION AND EQUALIZATION IN ORTHOGONAL FREQUENCY DIVISION MULTIPLEXING SYSTEMS" ITG-FACHBERICHTE, VDE VERLAG, vol. 135, 1995, pages 485-492, XP000749227 Berlin ISBN: 3-8007-2129-5**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 734 132 B1

Description

[0001] The invention relates to a radiocommunication system employing an orthogonal frequency division multiplexing technique, and more specifically to an orthogonal frequency division multiplexing transmission system suitable for use with a mobile communication system and a transmitter and a receiver therefor.

[0002] In recent years, digital modulation systems have been developed actively in the field of audio and video transmission. In digital terrestrial broadcasting, attention is paid, among others, to orthogonal frequency division multiplexing (hereinafter abbreviated to OFDM) modulation systems which are robust to multipath interference and have a high frequency usage rate. In the OFDM modulation system, a large number of carriers (several hundreds to several thousands) which are orthogonal to one another are each modulated with digital data to be transmitted.

[0003] With digital audio broadcasting using the OFDM modulation, each carrier is modulated by the differential QPSK method. In the differential QPSK method, data is made for transmission to correspond to a phase difference between symbols. At the receiving end, data can be demodulated by the (differential detection). Thus, there is an advantage that a demodulator used is simple in construction as compared that for the coherent detection system.

[0004] In addition, the differential QPSK method is also suitable for a mobile communication system. In a mobile-communication receiver, variations in envelope and phase of the received signal will occur due to fading channels. In the differential QPSK system, however, since data is demodulated from a phase difference between symbols, stable data reception can be achieved without being affected by variations in the received signal due to fading.

[0005] On the other hand, the use of the OFDM modulation system for digital television broadcasting needs a high transmission rate. In order to increase the transmission rate, it is required to use a multi-valued modulation method for each carrier. With digital television broadcasting using the OFDM modulation system, a multi-valued QAM method is used as a modulation method for each carrier. With the multi-valued QAM system, however, unlike the above-described differential QPSK method, it is impossible to transmit data in the form of a phase difference between symbols and, at the receiving end, to demodulate data by the differential detection. In order to demodulate multi-valued QAM demodulated signals, it is required to seek the amplitude and phase of each carrier at the receiving end.

[0006] For the multi-valued QAM system, therefore, a method has been proposed by which, at the transmitting end, reference symbols whose amplitude and phase are already known is transmitted periodically and, at the receiving end, the reference symbol are used as the reference amplitude and phase in demodulating multi-val-

ued QAM symbols.

[0007] However, the conventional OFDM transmission system described above has a problem that the transmission of reference data decreases the data transmission efficiency. One document disclosing such a prior art is WO95/07581.

[0008] It is accordingly an object of the invention to provide an orthogonal frequency division multiplexing transmission system, suitable for a mobile communication system and the like, which permits multi-valued modulated symbols to be demodulated successfully at the receiving end even in fading environments and permits the amount of transmit reference data to be reduced for increasing data transmission efficiency and a transmitter and a receiver therefor.

[0009] To achieve the object, an orthogonal frequency division multiplexing transmission system of the invention is characterized in that, at the transmitting end, a transmission frame is configured such that a plurality of slots are arranged two-dimensionally along time and frequency axes, reference symbols are inserted into predetermined restricted slots in the transmission frame, and PSK information symbols subjected to at least PSK modulation and information symbols subjected to digital modulation with a higher multi-value level than said PSK modulation are inserted into the other slots in a selected positional relation with respect to each other, and, at the receiving end, variations in amplitude and phase of a received signal are detected from the PSK information symbols in the transmission frame, the reference symbols in the transmission frame are corrected according to the detected variations in amplitude and phase of the received signal, and the information symbols received are demodulated according to the corrected reference symbols.

[0010] The orthogonal frequency division multiplexing transmission system of the invention is further characterized by the use of the following systems for transmitting the PSK information symbols.

[0011] According to a first transmission system, the PSK information symbols are inserted into predetermined slots of the transmission frame which are equally spaced in time and frequency.

[0012] In a second transmission system, the PSK information symbols are inserted into slots which are equally spaced along the time axis but are varied with time along the frequency axis.

[0013] In a third transmission system, the PSK information symbols are inserted into slots which are equally spaced along the frequency axis but are varied with frequency along the time axis.

[0014] In a fourth transmission system, the PSK information symbols are transmitted continuously in time at predetermined frequencies.

[0015] In a fifth transmission system, the PSK information symbols are subjected to differential coding using the reference symbols as the basis for the differential coding.

[0016] In a transmitter of the invention, multiplexing means configures a transmission frame in which a plurality of slots are arranged two-dimensionally along time and frequency axes. Reference symbols are inserted into restricted slots in the transmission frame. PSK information symbols subjected to PSK modulation and information symbols subjected to digital modulation with a higher multi-value level than said PSK modulation are inserted into the other slots in a predetermined positional relation with respect to each other. The reference symbols, the PSK information symbols and the information symbols are multiplexed together in this manner, thereby forming the transmission frame. The transmission frame is subjected to orthogonal frequency division multiplexing modulation by orthogonal frequency division multiplexing modulation means, then subjected to quadrature modulation for transmission.

[0017] The transmitter further comprises differential coding means between the multiplexing means and the orthogonal frequency division multiplexing modulation means, which differentially coding the PSK information symbols in the transmission frame.

[0018] A receiver of the invention includes error detecting means for detecting amplitude and phase errors of the carriers from the reference symbols in an orthogonal frequency division multiplexing demodulated signal, variation detecting means for detecting variations in amplitude and phase of a received signal from the PSK symbols in the demodulated signal, correcting information producing means responsive to the error detecting means and the variation detecting means for producing correcting information, and equalizing means for equalizing the amplitude and phase of the information symbols in the demodulated signal according to the correcting information.

[0019] In the receiver of the invention, the variation detecting means further includes means for detecting amplitude and phase variations of the received signal from the PSK information symbols in the demodulated signal and interpolation means responsive to the detecting means for interpolating amplitude and phase variations in the region into which only the information symbols other than the PSK information symbols are inserted.

[0020] The receiver of the invention further includes frequency control means for controlling the frequency of a regenerative carrier used for quadrature demodulation. In this frequency control means, the phase variations detected by the variation detecting means are averaged to produce a frequency control signal, which is applied to the quadrature demodulation means to control the frequency of the regenerative carrier.

[0021] Moreover, a receiver of the invention, for use with a transmission system for transmitting a transmission frame in which a plurality of PSK information symbols are inserted intermittently into an information symbol inserting region and the PSK information symbols are subjected to differential coding from a transmitter to

the receiver in the form of an orthogonal frequency division multiplexing modulated signal, comprises receiving means for receiving and quadrature demodulating the orthogonal frequency division multiplexing modulated signal, orthogonal frequency division multiplexing demodulation means for orthogonal frequency division multiplexing demodulating a quadrature demodulated signal output from the receiving means, and differential detection means for demodulating the PSK information symbols in the demodulated signal output from the orthogonal frequency division multiplexing demodulation means by means of differential detection.

[0022] The receiver further comprises frequency variation detecting means for detecting variations in frequency of a received signal from the PSK information symbols demodulated by the differential detecting means and frequency control means for averaging frequency variations detected by the frequency variation detecting means to produce a frequency control signal, which is applied to quadrature demodulation means of the receiving means to control the frequency of a regenerative carrier.

[0023] According to the above-described orthogonal frequency division multiplexing transmission system of the invention, at the receiving end, variations in amplitude and phase of a received signal are detected from the PSK information symbols, amplitude and phase errors of carriers detected from the reference symbols are corrected accordingly, and demodulated symbol data is equalized according to the corrected amplitude and phase errors. Therefore, amplitude and phase variations of the demodulated symbols due to fading can be equalized surely to reproduce the information symbols correctly without inserting any reference symbols into the information symbol region of the transmission frame. This permits all the information symbol region of the transmission frame to be used for information transmission, thereby increasing the information transmission efficiency.

[0024] The use of the system of the invention allows high-quality, high-efficiency information transmission to be implemented even in the case of use of fading channels as in mobile communication systems.

[0025] If, in transmitting the PSK information symbols and the information symbols, the PSK information symbols are inserted into predetermined slots which are equally spaced in time and space, then multiplexing control of the PSK information symbols will be performed easily.

[0026] If the PSK information symbols are inserted into slots which are equally spaced along the time axis but are varied with time along the frequency axis, then the PSK information symbols will be transmitted in all the carriers although the number of PSK information symbols per carrier is decreased. Thus, variations in a channel can be detected effectively in the case where the variations are small in time but large in frequency.

[0027] In contrast, if the PSK information symbols are

transmitted inserted into slots which are equally spaced along the frequency axis but are varied with frequency along the time axis, then the PSK information symbols are transmitted in all the time slots although the number of PSK information symbols per time slot are decreased. Thus, variations in a channel can be effectively in the case where the variations are small in frequency but large in time.

[0028] If the PSK information symbols are transmitted continuously in time in a predetermined time slot, then changes of the PSK information symbols with time at the receiving end can be detected continuously at a predetermined carrier. For this reason, variations in a channel can be detected correctly as compared with the case where the PSK information symbols are transmitted intermittently at all the carriers. If there is a phase error of a regenerative carrier at the receiving end, a phase rotation will occur in the demodulated output when viewed at a fixed carrier along the time axis. Thus, by transmitting the PSK information symbols by a predetermined carrier continuously, the frequency error of the regenerative carrier can be detected more correctly.

[0029] By transmitting the PSK information symbols in differential coded form using the reference symbols as the reference for differential coding, a differential detector can be used at the receiving end to demodulate the PSK information symbols. This allows the receiver to be simple in construction. The differential PSK system is robust to fading, allowing stabler data demodulation at the receiving end.

[0030] According to the above-described transmitter of the invention, the multiplexing means can be used to form and transmit an OFDM frame in which reference symbols and information symbols including at least PSK symbols are placed properly in the slots.

[0031] In addition, the differential coding of the PSK symbols permits the symbols to be demodulated by means of differential detection. Thus, the receiver can be made simple in construction.

[0032] Moreover, according to the above-described receiver of the invention, variations in amplitude and phase of a received signal are detected from the PSK symbols inserted into the information symbol region of the received transmission frame, amplitude and phase errors of each carrier detected from the reference symbols are corrected according to the detected variations in amplitude and phase, and then the demodulated symbols are equalized. For this reason, amplitude and phase variations due to fading can be corrected accurately even if a large number of reference symbols are not inserted into the transmission frame.

[0033] Furthermore, according to the receiver of the invention, variations in amplitude and phase of a received signal are detected from the PSK symbols inserted intermittently into a demodulated signal, and variations in amplitude and phase in the regions in the demodulated signal into which information symbols other than the PSK symbols are inserted are interpolated ac-

cording to the detected variations in amplitude and phase. The information symbols are equalized according to the interpolated variations in amplitude and phase. Thus, optimum equalization is permitted for each of the information symbols.

[0034] In addition, according to the receiver of the invention, variations in phase or frequency are detected from the demodulated PSK symbols and the detected values are averaged to control the frequency of a regenerative carrier used in the quadrature demodulation means. This permits more accurate frequency synchronization of the regenerative carrier to be achieved.

[0035] This invention can be more fully understood from the following detailed description when taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a diagram for use in explanation of a conventional OFDM system;

FIG. 2 shows a transmission frame format illustrating an OFDM transmission system according to a first embodiment of the invention;

FIG. 3 is a block diagram of a transmitter adapted for the OFDM transmission system according to the first embodiment of the invention;

FIG. 4 is a block diagram of a receiver adapted for the OFDM transmission system according to the first embodiment of the invention;

FIG. 5 shows in block diagram form the entire configuration of the transmission and reception system based on the OFDM transmission system of the invention;

FIG. 6 shows a transmission frame format illustrating an OFDM transmission system according to a second embodiment of the invention;

FIG. 7 shows a transmission frame format illustrating the OFDM transmission system according to the second embodiment of the invention;

FIG. 8 is a block diagram of a transmitter adapted for an OFDM transmission system according to a third embodiment of the invention;

FIG. 9 is a block diagram of a receiver adapted for the OFDM transmission system according to the third embodiment of the invention;

FIG. 10 is a block diagram of a receiver adapted for an OFDM transmission system according to a fourth embodiment of the invention;

FIG. 11 is a block diagram of a receiver adapted for an OFDM transmission system according to a fifth embodiment of the invention;

FIG. 12 shows a transmission frame format illustrating an OFDM transmission system according to still another embodiment of the invention;

FIG. 13 shows a transmission frame format illustrating an OFDM transmission system according to a further embodiment of the invention;

FIG. 14 shows a transmission frame format illustrating an OFDM transmission system according to a still further embodiment of the invention;

FIG. 15 shows a transmission frame format illustrating an OFDM transmission system according to another embodiment of the invention; and
FIG. 16 shows a transmission frame format illustrating an OFDM transmission system according to a further embodiment of the invention.

[0036] Referring now to FIG. 1, there is shown an example of a conventional OFDM transmission system, which is described in "Study of Modulation Method for Terrestrial Digital Broadcasting Using Multi-Valued OFDM" (the Journal of the Institute of Television Engineering, Japan, vol. 47, No. 10, pp 1374-1382, 1993). In this example, the number of carriers in one OFDM symbol is 448, and for each OFDM symbol one eighth of 448 pieces of data are reference data whose amplitude and phase are already known. Effective data other than the reference data is transmitted as 16QAM symbols. Since the position of carriers to transmit reference data is shifted for each OFDM symbol, one carrier will transmit the reference data every eight symbols.

[0037] Thus, a transmission frame is constructed from a plurality of OFDM symbols and reference data are placed in predetermined positions in the transmission frame for transmission. At the receiving end, frame synchronization is reestablished to receive the reference data and then reference amplitude and phase are obtained from the reference data to demodulate the 16QAM symbols.

[0038] The interval at which the reference data is transmitted is determined taking into consideration variations in the received signal due to fading. In the case of mobile reception in city areas, a large number of radio waves coming from various directions interfere with one another and so the envelope and the phase of a received wave will vary randomly. The envelope and the phase vary in accordance with the Rayleigh distribution and the uniform distribution, respectively. On such a Rayleigh channel, received waves vary in time and frequency but are considered almost constant within a certain time interval and a certain frequency range, which are referred to as a coherent time and a coherent bandwidth, respectively.

[0039] In FIG. 1, the interval at which reference data is transmitted is required to be much smaller than the coherent time of a channel.

[0040] However, with the OFDM transmission system as described above, the transmission of reference data reduces the data transmission efficiency decreases. In the example of FIG. 1, each carrier transmits reference data every eight symbols. Thus, the transmission efficiency will be decreased to 7/8.

[0041] In the present invention, a transmission frame is constructed at the transmitting end, such that a plurality of slots are arranged two-dimensionally along time and frequency axes. Reference symbol are placed into predetermined slots in this transmission frame. Into the other slots in the transmission frame are placed a plu-

ality of information symbols modulated by multiple digital modulation methods including at least PSK modulation. Specifically, PSK information symbols modulated by at least the PSK modulation method and information symbols modulated by another modulation method (for example, QAM modulation) are placed into the other slots.

[0042] At the receiving end, variations in the amplitude and phase of a received signal are detected from the PSK information symbol in the transmission frame received. The results of this detection processing are used to correct the reference symbols in the transmission frame. Further, the corrected reference symbol are used to demodulate the information symbols.

[0043] Hereinafter, the preferred embodiments will be described more specifically.

[First Embodiment]

[0044] In FIG. 2, which is a diagram for use in explanation of an OFDM system according to a first embodiment of the invention, there is shown a transmission frame format in which the number of carriers of an OFDM symbol is N (the number of effective carriers is n) and the number of OFDM symbols in one frame is M. In this embodiment, one frame is composed of $N \times M$ symbol data positions (slots) with N frequency slots arranged along the frequency axis and M time slots arranged along the time axis. At both ends of the transmission frame along the frequency axis are placed unused regions in which the carrier amplitude is set to zero.

[0045] In FIG. 2, in the first time slot of the transmission frame, an OFDM symbol is transmitted in which all the carriers are zero in amplitude. This OFDM symbol is called a null symbol and used in the receiver as a reference symbol for timing synchronization. In the second time slot, a reference OFDM symbol is transmitted in which the phase and amplitude of each carrier is already known. These reference signals are used in the receiver as a synchronization reference symbol adapted to recognize the frame and as demodulation reference signals for demodulating the phase and amplitude of each carrier. In the remaining time slots including the third time slot, information symbols composed mainly of multi-valued QAM information symbols are transmitted.

[0046] In and after the third OFDM symbol regions, among the multi-valued QAM information symbols QPSK information symbols are placed which are regularly spaced in frequency and time as shown in FIG. 2. The time spacing and the frequency spacing of the QPSK symbols are determined in consideration of the coherent time and the coherent bandwidth of a channel.

[0047] On the other hand, at the receiving end to receive the OFDM modulated signal in the above-described transmission format, the amplitude and phase of each carrier are sought when the reference symbols are received and are used as the basis for demodulating the information symbols. On a fading channel, however,

the amplitude and phase of a received signal vary in time and frequency. Thus, the variations in amplitude and phase of the received signal are detected through the QPSK information symbols periodically contained in the information symbols.

[0048] The QPSK information symbols are constant in amplitude and represent four phases at intervals of 90°. If, therefore, a variation in phase of a received signal is within $\pm 45^\circ$ in the interval at which the QPSK information symbols are transmitted, it will be possible to detect variations in amplitude and phase. For time slots and frequency slots in which no QPSK information symbol is transmitted, the detected variations in amplitude and phase of QPSK information symbols are interpolated with respect to time and frequency. The resulting interpolated information is used as variations for information symbols in portions in which no QPSK information symbol is transmitted in FIG. 2.

[0049] At the receiving end, variations in amplitude and phase of a received signal obtained in the above manner are used to correct the detected reference symbol. And information symbols in time - frequency slots are demodulated by using the corrected reference symbols.

[0050] Next, an OFDM transmitter and an OFDM receiver to which the OFDM transmission system described above is applied will be described.

[0051] In FIG. 3, there is shown, in block diagram form, the main portion of the OFDM transmitter.

[0052] In this figure, 11 denotes a multiplexer (MUX) which receives multi-valued QAM information symbols and QPSK information symbols as information symbol data.

[0053] Here, the multi-valued QAM information symbol and the QPSK information symbol to be transmitted may be high-level data and low-level data, respectively, in hierarchically structured data. For example, high-frequency component and low-frequency component of an image signal are processed as high-level data and low-level data, respectively, in hierarchically structured data. Moreover, the QAM information symbol and the QPSK information symbol may be data of independent types.

[0054] A null symbol generator 12 generates null symbol data in which each carrier is zero in amplitude, which is applied to the multiplexer 11. A reference symbol generator 13 generates reference symbol data used as a reference for the amplitude and phase of each carrier, which is applied to the multiplexer. The multiplexer multiplexes the multi-valued QAM information symbols, the QPSK information symbols as information symbol data, the null symbol data, and the reference symbol data, thereby forming a transmission frame as shown in FIG. 2. The reference symbol data is already known its amplitude and phases. There is a sine-sweep signal as an example of the reference symbol data. In the receiving side, it is used for demodulation and fine timing synchronization.

[0055] When another reference symbol for timing syn-

chronization is transmitted, QPSK symbols whose phases and known and random each other for the reference symbol data are used.

[0056] The multiplexed symbol data output from the multiplexer 11 is applied to an inverse fast discrete Fourier transformer (IFFT) 14, which performs an IFFT operation on N items of symbol data to produce a baseband OFDM modulated signal. The modulated signal is then applied to a guard period adding circuit 15, by which a latter portion of an OFDM symbol is copied into a former portion of that symbol as a guard period in order to reduce the effect of multipath interference. Note here that one OFDM symbol consists of N carriers.

[0057] The OFDM modulated signal from the guard period adding circuit 15 is applied to a quadrature modulator 16 to modulate carriers having a 90-degree phase difference. An output signal of the quadrature modulator is converted by a digital-to-analog converter (D/A) 17 into an analog signal, which is then converted by a frequency converter 18 to a given carrier frequency for transmission.

[0058] Reference numeral 19 denotes a timing circuit which is responsive to a clock signal from a clock generator not shown to produce a clock and timing signals necessary for the above-described circuits to operate properly.

[0059] In such a configuration, one transmission frame is produced by the multiplexer 11 in such a way that QPSK information symbols are periodically placed among multi-valued QAM information symbols in the information symbol region. This transmission frame is OFDM modulated and then up converted to a transmission carrier frequency for transmission.

[0060] In FIG. 4, there is shown in block diagram form the principal parts of an OFDM receiver.

[0061] In this figure, a radio modulated signal transmitted from the transmitter over a radio channel is frequency-converted by a frequency converter 21 to a given intermediate frequency and then converted by an analog-to-digital signal (A/D) 22 into a digital signal, which, in turn, is applied to a quadrature detector 23. The quadrature detector 23 detects the OFDM modulated signal of the intermediate frequency with a regenerative carrier to thereby output the baseband OFDM modulated signal.

[0062] An automatic frequency control (AFC) circuit 25 detects a frequency error of the regenerative carrier on the basis of the frequency of the OFDM modulated signal from the quadrature detector 23 and produces a signal used to control the frequency of the regenerative carrier. The frequency control signal is fed back to the quadrature detector 23 to control the frequency of the regeneration carrier produced within the quadrature detector, thereby achieving carrier synchronization.

[0063] The OFDM modulated signal output from the quadrature detector 23 is also applied to a timing regeneration circuit 26, which regenerates timing signals, such as a symbol sync signal, a frame sync signal, and

the like, and a clock on the basis of the reference symbol contained in the OFDM modulated signal and supplies them to each circuit in the receiver. The timing regeneration circuit 26 generates an FFT window indicating the effective symbol portion of the OFDM symbol and then supplies it to a fast discrete Fourier transformer (FFT) 24.

[0064] The FFT 24 is responsive to the FFT window from the timing circuit 26 to perform an FFT operation on the effective symbol portion of the OFDM symbol in the OFDM modulated signal output from the quadrature detector 23. By this FFT operation, complex data is obtained which represents the amplitude and phase of each carrier.

[0065] The complex data is entered into a memory 27, which holds given regions containing QPSK information symbols in the information symbol region of the transmission frame. That is, as will be described later, variations in amplitude and phase of a channel are detected on the basis of the QPSK information symbols and the results of this detection are used to obtain two-dimensionally interpolated variations for portions in which no QPSK information symbol is transmitted. Because of the existence of a time to obtain the interpolated variations, it is necessary to use the memory 27 for holding data. Information symbols read from the memory 27 are entered into an equalizer 31 for equalization. Since the equalizing process needs much time, rate of clock is increased to up the data processing speed in the equalizer 31. So the data read out speed of memory 27 is fast, that is, data rate converting is executed. The clock-rate of output data from equalizer 31 is high rate, then a memory 34 read the data in high speed. The output data from the memory 34 is converted the clock-rate to the original clock-rate which is input state of memory 27.

[0066] The complex data output from the FFT 24 is also entered into a reference symbol error detector 28. In this detector, a comparison is made between a received reference symbol and a comparison reference symbol generated by a reference symbol generator 29 to detect an amplitude error and a phase error of each carrier. The amplitude error and the phase error are applied to a correction circuit 30 and corrected by variations to be described later. The corrected amplitude and phase errors are applied to control terminals of the equalizer 31. Note that the reference symbol generator 29 generates comparison reference symbols which correspond to n reference symbols transmitted in the second time slot of a transmission frame.

[0067] The receiver of the present embodiment is equipped with a QPSK symbol error detector 32, an interpolation circuit 33, and the correction circuit 30. The QPSK symbol error detector 32 detects offsets of each QPSK information symbol contained in symbol data output from the equalizer 31 from its proper amplitude and phase values. The detected values represent variations in amplitude and phase of a received signal due to fading.

[0068] The interpolation circuit 33 obtains interpolated variations for equalizing information symbols in slots in which no QPSK symbol is transmitted within the information symbol region held in the memory 27 by the use of the detected variations from the QPSK symbol error detector 32. Thus, variations in amplitude and phase from the time of receipt of reference symbols are detected for each of the time - frequency slots that are held in the memory 27.

[0069] The correction circuit 30 corrects the amplitude error signal and the phase error signal obtained by the reference symbol error detector 28 using the interpolated variations from the interpolation circuit 33. The corrected amplitude and phase error signals are applied to the equalizer 31 to equalize the information symbols which have been held in the memory 27.

[0070] The symbol data output from the equalizer 31 is held in a memory 34 temporarily, the output data from the memory 34 is converted lower its speed, then applied to a demultiplexer 35. The demultiplexer removes the null symbols and the reference symbols and outputs the multi-valued QAM information symbols and the QPSK information symbols separately.

[0071] In operation, assume here that symbol data of the first frame are output from the quadrature detector 23 and the FFT 24. Then, the first data region of the symbol data of the first frame is held in the memory 27. At this point, the reference symbol error detector 28 makes a comparison between the received reference symbols in the demodulated symbol data and the comparison reference symbols to detect an amplitude error and a phase error of each carrier. The resulting amplitude and phase error signals are applied to the equalizer 31 via the correction circuit 30. In the equalizer, therefore, the symbol data in the first data region held in the memory 27 are subjected to equalization based on the amplitude and phase error signals.

[0072] When the equalized symbol data are output from the equalizer 31, the QPSK information symbol error detector 32 detects offsets of the QPSK symbols in the symbol data from their proper amplitude and phase values. That is, variations in amplitude and phase of the received wave due to fading are detected. By using the detected variations, the interpolation circuit 33 obtains interpolated variations for slots in which no QPSK information symbol is transmitted. Thereby, variations in amplitude and phase of symbols from the time of receipt of the reference symbols are detected for each of the time and frequency slots in the data region held in the memory 27.

[0073] When amplitude and phase variations in each slot are detected, the correction circuit 30 corrects the amplitude error and the phase error of each carrier which have been detected by the reference symbol error detector 28 by the amplitude and phase variations. The corrected amplitude and phase error signals are applied to the equalizer 31. Thus, in the equalizer 31 all the slots in the first data region held in the memory 27 are sub-

jected to equalization based on the corrected amplitude and error signals.

[0074] The equalized symbol data in the first data region are entered via the memory 34 into the demultiplexer 35, where the symbol data are separated into the multi-valued QAM information symbols and the QPSK information symbols for subsequent application to a succeeding signal processing circuit after the null symbols and the reference symbols have been removed.

[0075] After that, the above-described equalization process is performed repeatedly each time the next data region of demodulated symbol data is held in the memory 27. In each of subsequent equalization processes, outputs of the correction circuit 30 obtained in the last time slot in the equalization process for the previous data region are used as its initial values.

[0076] Therefore, in the receiver thus arranged, variations in amplitude and phase of a received wave are detected from multiple QPSK information symbols periodically inserted into the information symbol data region of a transmission frame, amplitude and phase errors of each carrier detected from reference symbols are corrected by the detected amplitude and phase variations, and waveform equalization is performed on demodulated symbol data by the corrected amplitude and phase errors. This permits amplitude and phase variations due to fading to be corrected without inserting a large number of reference symbols into a transmission frame.

[0077] That is, in the present embodiment, an OFDM transmission frame is generated and transmitted such that null symbols and reference symbols are placed only at the beginning of that frame, and QPSK information symbols are placed into the information symbol data region at regular intervals in both time and frequency. In the receiver, on the other hand, amplitude and phase errors of each carrier are detected from the reference symbols placed at the beginning of that transmission frame, variations in amplitude and phase of a received wave are detected from the QPSK information symbols, the amplitude and phase errors of each carrier detected from the reference symbols are corrected by the detected amplitude and phase variations to produce corrected amplitude and phase error signals, and demodulated symbol data are equalized by the corrected amplitude and phase error signals.

[0078] According to the present embodiment, therefore, without inserting any reference symbol into the information symbol data region of a transmission frame, variations in amplitude and phase of demodulated symbol data due to fading can be certainly equalized to reproduce information symbol data correctly. That is, multi-valued QAM information symbols and QPSK information symbols can be both utilized for information transmission.

[0079] The multi-valued QAM information symbol and the QPSK information symbol may be transmitted as high-level data and low-level data, respectively, of hierarchically structured data. Moreover, the QAM informa-

tion symbol and the QPSK information symbol may be data of independent types.

[0080] Thus, it becomes possible to use all the information symbol data region for information transmission, which will result in increased information transmission efficiency. That is, high-quality, high-efficiency information transmission can be realized even where fading transmission channels are used as in mobile communication systems.

[0081] In the transmitter, the QPSK information symbols are inserted at regular intervals for transmission and, in the receiver, amplitude and phase variations detected by the QPSK information symbols are used to interpolate amplitude and phase variations of the multi-valued QAM information symbols. For this reason, it becomes possible to perform optimum equalization on each of the information symbols. In addition, high-rate transmission characteristics based on the multi-valued QAM system can be maintained.

[0082] FIG. 5 shows collectively the principal parts of the receiver and the transmitter described above.

[0083] A multiplexer section 101 forms a transmission frame in which a plurality of slots are arranged two-dimensionally along the time and frequency axes, inserts reference symbols into restricted slots in the transmission frame, and inserts PSK information symbols subjected to PSK modulation and information symbols subjected to other digital modulation than the PSK modulation into the other slots in the transmission frame in a predetermined positional relation with respect to each other, whereby the reference symbols, the PSK information symbols and the information symbols are multiplexed. A modulation section 102 subjects the transmission frame to orthogonal frequency division multiplexing modulation. A transmitting section 103 subjects output signals of the modulation section to orthogonal modulation for transmission. In the receiver, on the other hand, a receiving section 111 receives and demodulates the orthogonal frequency division multiplexing modulated signal to obtain orthogonal demodulated signals. A demodulation section 112 subjects the demodulated signals from the receiving section to orthogonal frequency division multiplexing demodulation to obtain demodulated signals. Each symbol in the demodulated signals has its amplitude and phase equalized in an equalization section 113.

[0084] An error detecting section 114 detects amplitude and phase errors of carriers on the basis of the reference symbols in the demodulated signals output from the demodulation section 112. On the other hand, a variation detecting section 115 detects amplitude and phase variations of the received signal on the basis of the PSK information symbols in the demodulated signals output from the equalizing section 113. A correction information producing section 116 produces correction information on the basis of the amplitude and phase errors of the carriers and the amplitude and phase variations of the received signal and supplies it to the equal-

izing section 113. Good PSK information symbols and information symbols subjected to equalization in the equalization section 113 are separated by a separation section 117.

[Second Embodiment]

[0085] The second embodiment is an improvement over the first embodiment and subjects QPSK information symbols arranged in the information symbol data region with equal spacings in time and frequency to differential coding for transmission.

[0086] FIGS. 6 and 7 show transmission frame formats using the OFDM transmission system according to the second embodiment. Note that only the effective symbol region is shown in these figures.

[0087] In the OFDM transmission system of FIG. 6, reference symbols in the second time slot of the frame are utilized as the basis of differential coding. Each QPSK information symbol in the information symbol data region is sequentially subjected to differential coding in the direction indicated by arrows, i.e., along the time axis. This transmission system is advantageous where variations in a channel with time are small.

[0088] On the other hand, in the OFDM transmission system of FIG. 7, a reference symbol that is transmitted by a carrier of the lowest frequency is used as the basis of differential coding. Each QPSK information symbol in the information symbol data region is sequentially subjected to differential coding along the frequency axis as indicated by arrows. This transmission system is advantageous where variations in a channel with frequency are small.

[0089] Other differential coding methods are possible. That is, the arrangement of QPSK information symbols and the direction of differential coding may vary according to the characteristics of transmission channels.

[0090] FIG. 8 is a block diagram of an OFDM transmitter adapted to such a system for transmitting QPSK information symbols by differential coding. In this figure, like reference numerals are used to denote corresponding parts to those in the transmitter of FIG. 3 and detailed description thereof will be omitted.

[0091] Between the multiplexer 11 and the IFFT 14 is placed a differential coder 42 which is preceded by a memory 41. The memory 41 stores temporarily multiplexed symbol data output from the multiplexer 11 for subsequent differential coding. The differential coder 42 differentially codes QPSK information symbols in the multiplexed symbol data read from the memory 41 along the time axis or the frequency axis with a reference symbol or symbols used as the basis of differential coding.

[0092] By using such a transmitter, each QPSK information symbol arranged in the information symbol data region of a frame is sequentially transmitted in the differentially coded form. In a receiver for receiving such a transmission frame, therefore, a differential detector can be used to demodulate the QPSK information sym-

bols. This will also permit a simple type of receiver to be implemented which is designed to receive only the QPSK information symbols.

5 [Third Embodiment]

[0093] The third embodiment is intended to implement a simple type of receiver for receiving only QPSK information symbols by differentially coding the QPSK information symbols in transmitting hierarchically related data or independent data through multi-valued QAM information symbols and the QPSK information symbols.

[0094] FIG. 9 is a block diagram of a receiver which is adapted for an OFDM transmission system according to the third embodiment. In this figure, like reference numerals are used to denote corresponding parts to those in the receiver of FIG. 4 and detailed description thereof will be omitted.

[0095] In this receiver, symbol data, i.e., complex data, output from the FFT 24 is stored temporarily in a memory 51 and then entered into a differential detector 52. In this detector, differential detection is performed on the QPSK information symbols in the symbol data stored in the memory 51 by using the current symbol and the preceding one in the order of differential coding. The symbol data output of the differential detector 52 is applied to the demultiplexer 35 where only the demodulated QPSK information symbols are selectively output.

[0096] By causing the multi-valued QAM information symbols and the QPSK information symbols to carry independent data and differentially encoding the QPSK information symbols for transmission in this manner, a simple type of receiver can be constructed which demodulates only the differentially coded QPSK information symbols by differential detection. This type of receiver would be a pager by way of example.

40 [Fourth Embodiment]

[0097] According to the fourth embodiment, in an OFDM receiver, a regenerative carrier frequency control signal is produced on the basis of the result of detection of variations in phase of QPSK information symbols and the frequency control signal is fed back to a quadrature detector, thereby permitting variable control of the regenerative carrier frequency.

[0098] FIG. 10 is a block diagram of an OFDM receiver according to the fourth embodiment. In this figure, like reference numerals are used to denote corresponding parts to those in the receiver of FIG. 4 and detailed description thereof will be omitted.

[0099] In FIG. 10, phase variations detected by a QPSK symbol error detector 61 are entered into an averaging circuit 62 where averages are taken. An output signal of the averaging circuit 62 is added in an adder 63 to a frequency error signal from the AFC circuit 25,

thereby producing a frequency control signal. The frequency control signal is applied to the control terminal of a local oscillator of the quadrature detector 23. Thus, the regenerative carrier frequency will be controlled not only by frequency error information produced by the AFC circuit 25 but also by variations in phase of QPSK information symbols.

[0100] Here, phase variations of QPSK information symbols are produced not only by variations in transmission channels but also by a frequency error of the regenerative carrier. A change in phase due to fading is random but a change in phase due to a carrier frequency error is constant for all the carriers. Thus, by averaging phase error signals obtained by the QPSK symbol error detector 61, an error of the regenerative carrier frequency can be detected. By adding a signal representing the frequency error to an output signal of the AFC circuit 25 and then applying to the control section of the local oscillator of the quadrature detector 23, more accurate frequency synchronization of the regenerative carrier can be achieved.

[Fifth Embodiment]

[0101] According to the fifth embodiment, in the simple type of receiver, described previously as the third embodiment, which receives only QPSK information symbols, a regenerative carrier frequency control signal is produced on the basis of variations in phase of demodulated QPSK information symbols and then fed back to the quadrature detector, thereby performing variable control of the regenerative carrier frequency.

[0102] FIG. 11 is a block diagram of an OFDM receiver according to the fifth embodiment. In this figure, like reference numerals are used to denote corresponding parts to those in the receiver of FIG. 9 and description thereof is omitted.

[0103] In FIG. 11, the output of the differential detector branches to a frequency error detector 71, which detects a change in phase with time using QPSK information symbols demodulated by differential detection. The outputs of the frequency error detector 71 are averaged by an averaging circuit 72. An output signal of the averaging circuit 73 is added to the output of the AFC circuit 25 in an adder 73 whose output is coupled to the quadrature detector 23.

[0104] In the receiver thus arranged, variations in frequency of the regenerative carrier are detected by variations in phase of the QPSK information symbols and then the frequency of the regenerative carrier is corrected accordingly. Thus, accurate frequency synchronization of the regenerative carrier can be achieved.

[Other Embodiments]

[0105] The OFDM transmission system of the present invention can be embodied in the following ways.

[0106] FIGS. 12 through 16 show transmission frame

formats of the respective embodiments.

[0107] First, the system shown in FIG. 12 is identical to the first embodiment shown in FIG. 2 in carrier frequency assignment for QPSK information symbols, but the QPSK information symbols are staggered along the time axis. According to this system, although the number of QPSK information symbols per time slot is reduced, they are transmitted in all the time slots. Thus, variations in transmission channels can be detected effectively when they are small in frequency relation but great in time relation.

[0108] Next, the system of FIG. 13 is identical to the first embodiment of FIG. 2 in time slot assignment for QPSK information symbols, but the QPSK information symbols are staggered in frequency. According to this system, although the number of QPSK information symbols per frequency slot is reduced, the symbols are transmitted in all the frequency slots. Thus, variations in transmission channels can be detected effectively when they are small in time but great in frequency.

[0109] Depending on the transmission path characteristics, combined use may be made of the system shown in FIG. 12 in which QPSK information symbols are transmitted in all the time slots and the system shown in FIG. 13 in which QPSK information symbols are transmitted in all the frequency slots.

[0110] The system shown in FIG. 14 is substantially the same as the first embodiment in that QPSK information symbols are equally spaced in time and frequency but differs in that QPSK information symbols of given frequencies are transmitted continuously in time.

[0111] The use of this system to transmit a frame allows the receiver to detect changes in the QPSK information symbols with time at given carriers continuously and correctly. Thus, it becomes possible to detect variations in transmission channel characteristics more correctly than the first embodiment. If there is a regenerative carrier frequency error in the receiver, then a phase rotation will occur in demodulated outputs when variations of a given carrier are viewed with respect to time. Thus, the continuous transmission of QPSK information symbols in given frequency slots as shown in FIG. 14 permits the regenerative carrier frequency error to be detected more accurately than the first embodiment.

[0112] The system shown in FIG. 15 is distinct from the system of FIG. 13 in that PQSK symbols at given carriers are transmitted continuously in time. As with the system described in connection with FIG. 14, this system also permits the regenerative carrier frequency error to be detected more accurately.

[0113] Finally, the system shown in FIG. 16 is distinct from the system of FIG. 12 in that PQSK information symbols at given carriers are transmitted continuously in time. As with the system described in connection with FIG. 13, this system also permits the regenerative carrier frequency error to be detected more accurately.

[0114] The invention is not limited to the above-described embodiments. For example, although the em-

bodiments were described as using QPSK information symbols and multi-valued QAM information symbols as information symbols, the QPSK symbols may be replaced with other PSK symbols such as 8PSK symbols, 16PSK symbols, or the like, depending on transmission channel conditions. In addition, the multi-valued QAM information symbols may be replaced with information symbols based on another modulation method or multiple modulation methods.

[0115] The numbers of time slots and frequency slots in one transmission frame and the arrangement of the transmitter and receiver may be modified in still other ways without departing the scope of the present invention.

[0116] As described above, in the OFDM transmission system of the invention, at the transmitting end, a transmission frame is constructed and transmitted such that a plurality of slots are arranged two-dimensionally in time and frequency, reference symbols are inserted into predetermined slots in the transmission frame, and a plurality of information symbols modulated by multiple digital modulation methods including at least the PSK modulation method are inserted into the other slots in a predetermined positional relationship depending on the digital modulation methods, and at the receiving end, variations in amplitude and phase of a received signal are detected on the basis of the PSK symbols in the received transmission frame to correct the reference symbols in the transmission frame and the information symbols are demodulated on the basis of the corrected reference symbols.

[0117] According to the invention, therefore, orthogonal frequency division multiplexing transmission systems suitable for mobile communication systems and transmitters and receivers for use with the systems which permit multi-valued modulated symbols to be demodulated surely even in fading environments and the amount of transmit reference data to be reduced to thereby improve the data transmission efficiency.

Claims

1. An orthogonal frequency division multiplexing transmission system for radio transmission of information from a transmitter to a receiver using orthogonal frequency division multiplexing modulation **characterized in that**

said transmitter (101-103) for transmitting information is arranged such that a transmission frame is configured in which a plurality of slots are arranged two-dimensionally along time and frequency axes, reference symbols are inserted into predetermined restricted slots in said transmission frame, and PSK information symbols subjected to at least PSK modulation and information symbols subjected to digital modulation other than said PSK modulation are inserted into the other slots in a se-

lected positional relation with respect to each other, and

said receiver (111-116) for receiving the information is arranged such that variations in amplitude and phase of a received signal are detected from said PSK information symbols in said transmission frame, said reference symbols in said transmission frame are corrected on the basis of detected variations in amplitude and phase of said received signal, and said information symbols received are demodulated on the basis of the corrected reference symbols.

2. The system according to claim 1, **characterized in that** said transmitter is adapted to insert said PSK information symbols into slots of said transmission frame that are equally spaced in time and frequency.
3. The system according to claim 1, **characterized in that** said transmitter is adapted to insert said PSK information symbols into slots of said transmission frame that are equally spaced along the time axis but are varied with time along the frequency axis.
4. The system according to claim 1, **characterized in that** said transmitter is adapted to insert said PSK information symbols into slots of said transmission frame which are equally spaced in frequency but are varied with frequency along the time axis.
5. The system according to any one of claims 1 to 4, **characterized in that** said transmitter is adapted to transmit said PSK information symbols in a predetermined frequency slot in said transmission frame continuously in time.
6. The system according to any one of claims 1 to 4, **characterized in that** said transmitter is adapted to differentially code said PSK information symbols with said reference symbols used as the basis of differential coding.
7. A transmitter for use with an orthogonal frequency division multiplexing transmission system for radio transmission of information from a transmitter to a receiver using orthogonal frequency division multiplexing modulation, comprising:

multiplexing means (11) for multiplexing reference symbols, PSK information symbols subjected to at least PSK modulation, and information symbols subjected to digital modulation other than said PSK modulation by configuring a transmission frame such that a plurality of slots are two-dimensionally arranged along time and frequency axes, said reference symbols are inserted into predetermined restricted

slots in said transmission frame, and said PSK information symbols and said information symbols are inserted into the other slots of said transmission frame in a predetermined positional relation with respect to each other; 5
orthogonal frequency division multiplexing modulation means (14) for orthogonal frequency division multiplexing modulating said transmission frame configured by said multiplexing means; and 10
transmitting means (15-18) for orthogonal modulating output signals of said orthogonal frequency division multiplexing modulation means for transmission. 15

8. The transmitter according to claim 7, **characterized in** further including differential coding means (41, 42) between said multiplexing means (11) and said orthogonal frequency division multiplexing modulation means (14) for differential coding said PSK information symbols in said transmission frame configured by said multiplexing means. 20

9. A receiver, for use with an orthogonal frequency division multiplexing transmission system for radio transmission of information from a transmitter to a receiver by orthogonal frequency division multiplexing modulation using multiple carriers, comprising: 25

receiving means (21, 22, 23) for receiving and orthogonal demodulating an orthogonal frequency division multiplexing modulated signal to recover an orthogonal demodulated signal, said orthogonal frequency division multiplexing modulated signal including a transmission frame in which a plurality of slots are two-dimensionally arranged along time and frequency axes, reference symbols are inserted into predetermined restricted slots, and PSK information symbols subjected to at least PSK modulation and information symbols subjected to other digital modulation that said PSK modulation are inserted into the other slots in a predetermined positional relation with respect to each other; 30
orthogonal frequency division multiplexing demodulation means (24) for orthogonal frequency division multiplexing demodulating said orthogonal demodulated signal from said receiving means to obtain a demodulated signal; 35
equalizing means (27, 31) for equalizing the amplitude and phase of each symbol in said demodulated signal from said orthogonal frequency division multiplexing demodulation means; 40
error detecting means (28, 29) for detecting amplitude errors and phase errors of said multiple carriers from said reference symbols in said demodulated signal output from said or- 45
50
55

thogonal frequency division multiplexing demodulation means; 5
variation detecting means (32, 33) for detecting variations in amplitude and phase of a received signal from said PSK information symbols in said demodulated signal equalized by said equalizing means; and
correcting information producing means (30) for producing correcting information from said amplitude errors and phase errors of said multiple carriers detected by said error detecting means and said variations in amplitude and phase of said received signal detected by said variation detecting means, 10
said equalizing means (31) being responsive to said correcting information from said correcting information producing means to correct the amplitude and phase of said symbols in said demodulated signal output from said orthogonal frequency division multiplexing demodulation means. 15

10. The receiver according to claim 9, **characterized in that** said variation detecting means (32, 33) includes amplitude and phase variation detecting means (32) for detecting variations in amplitude and phase of a received signal from said PSK information symbols in said demodulated signal output from said equalizing means (31), and interpolation means (33) for seeking variations in amplitude and phase for information symbols other than said PSK information symbols by interpolation on the basis of outputs of said amplitude and phase variation detecting means (32). 25

11. The receiver according to any one of claims 9 and 10, **characterized by** further comprising frequency control means (62) for averaging phase variations detected by said variation detecting means to produce a frequency control signal and supplying it to said receiving means to thereby control the frequency of a regenerative carrier. 30

12. A receiver for use with a transmission system for orthogonal frequency division multiplexing modulating a transmission frame in which a plurality of PSK information symbols are inserted intermittently into an information symbol inserted region and said PSK information symbols are subjected to differential coding for radio transmission from a transmitter to a receiver **characterized by** comprising: 35
40
45
50
55

receiving means (21, 22, 23) for receiving and orthogonal demodulating an orthogonal frequency division multiplexing modulated signal; orthogonal frequency division multiplexing demodulation means (24) for orthogonal frequency division multiplexing demodulating an or-

thogonal demodulated signal from said receiving means; and
 delayed detection means (51, 52) for demodulating PSK symbols in a demodulated signal from said orthogonal frequency division multiplexing demodulation means by delayed detection.

13. The receiver according to claim 12, **characterized by** further comprising frequency variation detecting means (71) for detecting variations in frequency of a received signal from said PSK information symbols demodulated by said delayed detection means, and frequency control means (72, 73) for averaging frequency variations detected by said frequency variation detecting means to produce a frequency control signal and supplying it to said receiving means to control the frequency of a regenerative carrier.

Patentansprüche

1. OFDM-Übertragungssystem zur Funkübertragung von Information von einem Sender zu einem Empfänger mit OFDM-Modulation, **dadurch gekennzeichnet, dass**

der Sender (101-103) zum Übertragen von Information angeordnet ist, sodass ein Übertragungsframe konfiguriert ist, bei dem eine Mehrzahl von Schlitzen zweidimensional entlang Zeit- und Frequenzachsen angeordnet ist, wobei Bezugssymbole in vorbestimmte beschränkte Schlitze in dem Übertragungsframe eingefügt sind, und PSK-Informationssymbole, die mindestens einer PSK-Modulation unterzogen wurden, und Informationssymbole, die einer von der PSK-Modulation unterschiedlichen digitalen Modulation unterzogen wurden, in die anderen Schlitze in einer ausgewählten Positionsbeziehung mit Bezug zueinander eingefügt sind, und

der Empfänger (111-116) zum Empfangen der Information angeordnet ist, sodass Variationen in der Amplitude und Phase eines empfangenen Signals von den PSK-Informationssymbolen in dem Übertragungsframe erfasst werden, wobei die Bezugssymbole in dem Übertragungsframe auf der Grundlage von erfassten Variationen in der Amplitude und Phase des empfangenen Signals korrigiert und die empfangenen Informationssymbole auf der Grundlage der korrigierten Bezugssymbole demoduliert werden.

2. System gemäß Anspruch 1, **dadurch gekennzeichnet, dass** der Sender angepasst ist, um die PSK-Informationssymbole in Schlitze des Übertragungsframes einzufügen, die in Zeit und Frequenz gleichmäßig beabstandet sind.

3. System gemäß Anspruch 1, **dadurch gekennzeichnet, dass** der Sender angepasst ist, um die PSK-Informationssymbole in Schlitze des Übertragungsframes einzufügen, die gleichmäßig entlang der Zeitachse beabstandet sind, jedoch über die Zeit entlang der Frequenzachse variiert werden.

4. System gemäß Anspruch 1, **dadurch gekennzeichnet, dass** der Sender angepasst ist, um die PSK-Informationssymbole in Schlitze des Übertragungsframes einzufügen, die gleichmäßig in der Frequenz beabstandet sind, jedoch über die Frequenz entlang der Zeitachse variiert werden.

5. System gemäß einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** der Sender angepasst ist, um die PSK-Informationssymbole in einem vorbestimmten Frequenzschlitz in dem Übertragungsframe kontinuierlich in der Zeit zu übertragen.

6. System gemäß einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** der Sender angepasst ist, um die PSK-Informationssymbole differentiell zu codieren, wobei die Bezugssymbole als Grundlage der Differentialcodierung verwendet werden.

7. Sender für ein OFDM-Übertragungssystem zur Funkübertragung von Information von einem Sender zu einem Empfänger mit OFDM-Modulation, umfassend:

ein Multiplexmittel (11) zum Multiplexen von Bezugssymbolen, PSK-Informationssymbolen, die mindestens einer PSK-Modulation unterzogen wurden, und Informationssymbolen, die einer von der PSK-Modulation unterschiedlichen digitalen Modulation unterzogen wurden, durch Konfigurieren eines Übertragungsframes, sodass eine Mehrzahl von Schlitzen zweidimensional entlang Zeit- und Frequenzachsen angeordnet ist, wobei die Bezugssymbole in vorbestimmte beschränkte Schlitze in dem Übertragungsframe eingefügt sind, und die PSK-Informationssymbole und die Informationssymbole in die anderen Schlitzen des Übertragungsframes in einer vorbestimmten Positionsbeziehung mit Bezug zueinander eingefügt sind;

ein OFDM-Modulationsmittel (14) zum OFDM-Modulieren des durch das Multiplexmittel konfigurierten Übertragungsframes; und
 ein Übertragungsmittel (15-18) zum orthogonalen Modulieren von Ausgangssignalen des OFDM-Modulationsmittels zur Übertragung.

8. Sender gemäß Anspruch 7, **gekennzeichnet** fer-

ner durch ein Differentialcodiermittel (41, 42) zwischen dem Multiplexmittel (11) und dem OFDM-Modulationsmittel (14) zum differentiellen Codieren der PSK-Informationssymbole in dem durch das Multiplexmittel konfigurierten Übertragungsframe.

9. Empfänger für ein OFDM-Übertragungssystem zur Funkübertragung von Informationen von einem Sender zu einem Empfänger durch OFDM-Modulation mittels mehrerer Träger, umfassend:

ein Empfangsmittel (21, 22, 23) zum Empfangen und orthogonalen Demodulieren eines OFDM-modulierten Signals, um ein orthogonales demoduliertes Signal wiederherzustellen, wobei das OFDM-modulierte Signal ein Übertragungsframe aufweist, bei dem eine Mehrzahl von Schlitzen zweidimensional entlang Zeit- und Frequenzachsen angeordnet ist, Bezugssymbole in vorbestimmte beschränkte Schlitze eingefügt sind und PSK-Informationssymbole, die mindestens einer PSK-Modulation unterzogen wurden, und Informationssymbole, die einer anderen digitalen Modulation als der PSK-Modulation unterzogen wurden, in die anderen Schlitze in einer vorbestimmten Positionsbeziehung mit Bezug zueinander eingefügt sind;

ein OFDM-Demodulationsmittel (24) zum OFDM-Demodulieren des orthogonalen demodulierten Signals von dem Empfangsmittel, um ein demoduliertes Signal zu erhalten;

ein Entzerrungsmittel (27, 31) zum Entzerren der Amplitude und Phase jedes Symbols in dem demodulierten Signal von dem OFDM-Demodulationsmittel;

ein Fehlererfassungsmittel (28, 29) zum Erfassen von Amplitudenfehlern und Phasenfehlern der mehreren Träger aus den Bezugssymbolen in dem demodulierten Signal, das von dem OFDM-Demodulationsmittel ausgegeben wird;

ein Variationserfassungsmittel (32, 33) zum Erfassen von Variationen in Amplitude und Phase eines empfangenen Signals aus den PSK-Informationssymbolen in dem durch das von dem Entzerrungsmittel entzerrten demodulierten Signal; und

ein Korrekturinformationserzeugungsmittel (30) zum Erzeugen von Korrekturinformation aus den Amplitudenfehlern und Phasenfehlern der mehreren Träger, die durch das Fehlererfassungsmittel erfasst werden, und den Variationen in der Amplitude und Phasen des empfangenen Signals, die durch das Variationserfassungsmittel erfasst werden,

wobei das Entzerrungsmittel (31) von der Korrekturinformation von dem KorrekturInformations-

erzeugungsmittel abhängt, um die Amplitude und Phase der Symbole in dem demodulierten Signal zu korrigieren, das von dem OFDM-Demodulationsmittel ausgegeben wird.

10. Empfänger gemäß Anspruch 9, **dadurch gekennzeichnet, dass** das Variationserfassungsmittel (32, 33) ein Amplituden- und Phasenvariationserfassungsmittel (32) zum Erfassen von Variationen in der Amplitude und Phase eines empfangenen Signals aus dem PSK-Informationssymbolen in dem demodulierten Signal, das von dem Entzerrungsmittel (31) ausgegeben wird, und ein Interpolationsmittel (33) zum Suchen von Variationen in der Amplitude und Phase für von den PSK-Informationssymbolen unterschiedlichen Informationssymbole durch Interpolation auf der Grundlage der Ausgabe des Amplituden- und Phasenvariationserfassungsmittels (32) aufweist.

11. Empfänger gemäß einem der Ansprüche 9 und 10, ferner **gekennzeichnet durch** ein Frequenzsteuermittel (62) zur Mittelwertbildung von Phasenvariationen, die **durch** das Variationserfassungsmittel erfasst werden, um ein Frequenzsteuersignal zu erzeugen und es an das Empfangsmittel zu liefern, und **dadurch** die Frequenz eines regenerativen Trägers zu steuern.

12. Empfänger für ein Übertragungssystem zur OFDM-Modulation eines Übertragungsframes, bei dem eine Mehrzahl von PSK-Informationssymbolen abwechselnd in eine Informationssymboleingefügte Region eingefügt sind und die PSK-Informationssymbole einer Differentialcodierung zur Funkübertragung von einem Sender zu einem Empfänger unterzogen werden, **gekennzeichnet durch**:

ein Empfangsmittel (21, 22, 23) zum Empfangen und orthogonalen Demodulieren eines OFDM-modulierten Signals;

ein OFDM-Demodulationsmittel (24) zum OFDM-Demodulieren eines orthogonalen demodulierten Signals aus dem Empfangsmittel; und ein verzögertes Erfassungsmittel (51, 52) zum Demodulieren von PSK-Symbolen in einem demodulierten Signal aus den OFDM-Demodulationsmittel **durch** verzögerte Erfassung.

13. Empfänger gemäß Anspruch 12, ferner **gekennzeichnet durch** ein Frequenzvariationserfassungsmittel (71) zur Erfassung von Variationen in der Frequenz eines empfangenen Signals aus den PSK-Informationssymbolen, die **durch** das verzögerte Erfassungsmittel demoduliert werden, und ein Frequenzsteuermittel (72, 73) zur Mittelwertbildung von Frequenzvariationen, die **durch** das Frequenzvariationserfassungsmittel erfasst werden,

um ein Frequenzsteuersignal zu erzeugen und es an das Empfangsmittel zu liefern, um die Frequenz eines regenerativen Trägers zu steuern.

Revendications

1. Système de transmission à multiplexage par répartition de fréquences orthogonales pour une émission radio d'une information d'un émetteur à un récepteur en utilisant une modulation de multiplexage par répartition de fréquences orthogonales, **caractérisé en ce que**

ledit émetteur (101 - 103) servant à émettre une information est agencé de telle sorte qu'une trame d'émission est configurée, trame dans laquelle une pluralité de créneaux sont disposés de façon bidimensionnelle le long de l'axe des temps et de l'axe des fréquences, des symboles de référence sont insérés dans des créneaux limités prédéterminés dans ladite trame d'émission et des symboles d'information PSK soumis à au moins une modulation PSK et des symboles d'information soumis à une modulation numérique autre que ladite modulation PSK sont insérés dans les autres créneaux dans une relation de position sélectionnée les uns par rapport aux autres, et

ledit récepteur (111 - 116) servant à recevoir l'information est agencé de telle sorte que des variations de l'amplitude et de la phase d'un signal reçu sont détectées à partir desdits symboles d'information PSK dans ladite trame d'émission, lesdits symboles de référence dans ladite trame d'émission sont corrigés sur la base de variations détectées de l'amplitude et de la phase dudit signal reçu, lesdits symboles d'information reçus sont démodulés sur la base des symboles de référence corrigés.

2. Système selon la revendication 1, **caractérisé en ce que** ledit émetteur est adapté pour insérer lesdits symboles d'information PSK dans des créneaux de ladite trame d'émission, qui sont également espacés dans le temps et du point de vue des fréquences.

3. Système selon la revendication 1, **caractérisé en ce que** ledit émetteur est adapté pour insérer lesdits symboles d'information PSK dans des créneaux de ladite trame d'émission, qui sont également espacés le long de l'axe des temps, mais sont modifiés dans le temps le long de l'axe des fréquences.

4. Système selon la revendication 1, **caractérisé en ce que** ledit émetteur est adapté de manière à insérer lesdits symboles d'information PSK dans des créneaux de ladite trame d'émission, qui sont également espacés du point de vue fréquence, mais

sont modifiés avec la fréquence le long de l'axe des temps.

5. Système selon l'une quelconque des revendications 1 à 4, **caractérisé en ce que** ledit émetteur est adapté pour émettre continûment dans le temps lesdits symboles d'information PSK dans un créneau prédéterminé de fréquences dans ladite trame d'émission.

6. Système selon l'une quelconque de revendications 1 à 4, **caractérisé en ce que** ledit émetteur est adapté pour coder de façon différentielle lesdits symboles d'information PSK avec lesdits symboles de référence utilisés en tant que base du codage différentiel.

7. Emetteur destiné à être utilisé avec un système d'émission à multiplexage par répartition de fréquences orthogonales pour une émission radio d'une information depuis un émetteur vers un récepteur en utilisant une modulation de multiplexage par répartition des fréquences orthogonales, comprenant:

des moyens de multiplexage (11) pour multiplexer des symboles de référence, des symboles d'information PSK soumis à au moins une modulation PSK et des symboles d'information soumis à une modulation numérique autre que ladite modulation PSK par configuration d'une trame d'émission de telle sorte qu'une pluralité de créneaux sont disposés de façon bidimensionnelle le long de l'axe des temps et de l'axe des fréquences, lesdits symboles de référence sont insérés dans des créneaux limités prédéterminés dans ladite trame de fréquence d'émission, et lesdits symboles d'information PSK et lesdits symboles d'information sont insérés dans les autres créneaux de ladite trame d'émission dans une relation de position prédéterminée les uns par rapport aux autres; des moyens (14) de modulation à multiplexage par répartition de fréquences orthogonales pour moduler selon un multiplexage par répartition de fréquences orthogonales, ladite trame d'émission configurée par lesdits moyens de multiplexage; et des moyens d'émission (15 - 18) pour moduler des signaux de sortie desdits moyens de modulation à multiplexage par répartition de fréquences orthogonales pour l'émission.

8. Emetteur selon la revendication 7, **caractérisé en ce qu'il** comprend en outre des moyens de codage différentiel (41, 42) entre lesdits moyens de multiplexage (11) et lesdits moyens (14) de modulation à multiplexage par répartition de fréquences ortho-

gonales, pour réaliser le codage différentiel desdits symboles d'information PSK dans ladite trame d'émission configurée par lesdits moyens de multiplexage.

9. Récepteur destiné à être utilisé dans un système d'émission à multiplexage par répartition de fréquences orthogonales pour une émission radio d'information d'un émetteur à un récepteur au moyen d'une modulation à multiplexage par répartition de fréquences orthogonales, utilisant de multiples porteuses, comprenant:

des moyens de réception (21, 22, 23) pour recevoir et démoduler orthogonalement la réception et la démodulation orthogonale d'un signal modulé à multiplexage par répartition de fréquences orthogonales pour récupérer un signal démodulé par démodulation orthogonale, ledit signal modulé à multiplexage par répartition dans le temps à fréquences orthogonales comprenant une trame d'émission, dans laquelle la pluralité de créneaux sont disposés de façon bidimensionnelle sur l'axe des temps et sur l'axe des fréquences, des symboles de référence sont insérés dans des créneaux limités prédéterminés et des symboles d'information PSK soumis à au moins une modulation PSK et des symboles d'information soumis à une modulation numérique autre que ladite modulation PSK sont insérés dans d'autres créneaux dans une relation de position prédéterminée les uns par rapport aux autres;

des moyens (24) de démodulation à multiplexage par répartition de fréquences orthogonales pour la démodulation à multiplexage par répartition de fréquences orthogonales, dudit signal démodulé de façon orthogonale délivrés par lesdits moyens de réception pour l'obtention d'un signal démodulé;

des moyens d'égalisation (27, 31) pour égaliser l'amplitude et la phase de chaque symbole dans ledit signal démodulé délivré par lesdits moyens de démodulation à multiplexage par répartition de fréquences orthogonales;

des moyens de détection d'erreurs (28, 29) pour détecter des erreurs d'amplitude et des erreurs de phase desdites porteuses multiples à partir desdits symboles de référence dans ledit signal démodulé délivré par lesdits moyens de démodulation à multiplexage par répartition de fréquences orthogonales;

des moyens (32, 33) de détection de variations pour détecter des variations de l'amplitude et de la phase d'un signal reçu à partir desdits symboles d'information PSK dans ledit signal démodulé, égalisés par lesdits moyens d'égalisation; et

des moyens (30) de production d'information de correction pour produire une information de correction à partir desdites erreurs d'amplitude et desdites erreurs de phase desdites porteuses multiples détectées par lesdits moyens de détecteur d'erreurs et lesdites variations d'amplitude et de phase dudit signal reçu détecté par lesdits moyens de détection de variation, lesdits moyens d'égalisation (31) étant aptes à répondre à ladite information de correction à partir desdits moyens de production d'information de correction pour corriger l'amplitude et la phase desdits symboles dans ledit signal démodulé délivré par lesdits moyens de démodulation à multiplexage par répartition de fréquences orthogonales.

10. Récepteur selon la revendication 9, **caractérisé en ce que** lesdits moyens (32, 33) de détection de variations incluent des moyens (32) de détection de variations d'amplitude et de phase pour détecter des variations de l'amplitude et de la phase d'un signal reçu à partir desdits symboles d'information PSK dans ledit signal démodulé délivré par lesdits moyens d'égalisation (31), et des moyens d'interpolation (33) pour rechercher des variations d'amplitude et de phase pour des symboles d'information autres que lesdits symboles d'information PSK, par interpolation sur la base des signaux de sortie desdits moyens (32) de détection de variations de l'amplitude et de la phase.

11. Récepteur selon l'une quelconque des revendications 9 et 10, **caractérisé en ce qu'il** comporte en outre des moyens (62) de commande de fréquence pour former la moyen de variations de phase détectées par lesdits moyens de détection de variation pour produire un signal de commande de fréquence et l'envoyer auxdits moyens de réception pour commander de ce fait la fréquence d'une porteuse régénérative.

12. Récepteur destiné à être utilisé avec un système d'émission pour moduler par multiplexage par répartition de fréquences orthogonales, une trame d'émission, dans laquelle une pluralité de symboles d'information PSK sont insérés de façon intermittente dans une région d'insertion de symboles d'information, et lesdits symboles d'information PSK sont soumis à un codage différentiel pour l'émission radio depuis un émetteur en direction d'un récepteur, **caractérisé en ce qu'il** comprend:

des moyens de réception (21, 22, 23) pour recevoir et réaliser une démodulation orthogonale d'un signal modulé par multiplexage par répartition de fréquences orthogonales;

des moyens (24) de démodulation à multiplexa-

ge par répartition de fréquences orthogonales pour la démodulation avec multiplexage avec répartition de fréquences orthogonales d'un signal démodulé de façon orthogonale fourni par lesdits moyen de réception; et 5
des moyens de détection retardés (51, 52) pour démoduler des symboles PSK dans un signal démodulé fourni par lesdits moyens de démodulation à multiplexage par répartition de fréquences orthogonales, à l'aide d'une détection retardée. 10

13. Récepteur selon la revendication 12, **caractérisé en ce qu'il** comprend en outre des moyens (71) de détection de variations de fréquences pour détecter des variations de la fréquence d'un signal reçu à partir desdits symboles d'information PSK modulés par lesdits moyens de détection retardée, et des moyens (72, 73) de commande de fréquence pour former la moyenne de variations de fréquence détectées par lesdits moyens de détection de variation de fréquence pour produire un signal de commande de fréquence et l'envoyer auxdits moyens de réception pour commander la fréquence d'une porteuse régénérative. 15
20
25

30


35

40

45

50

55

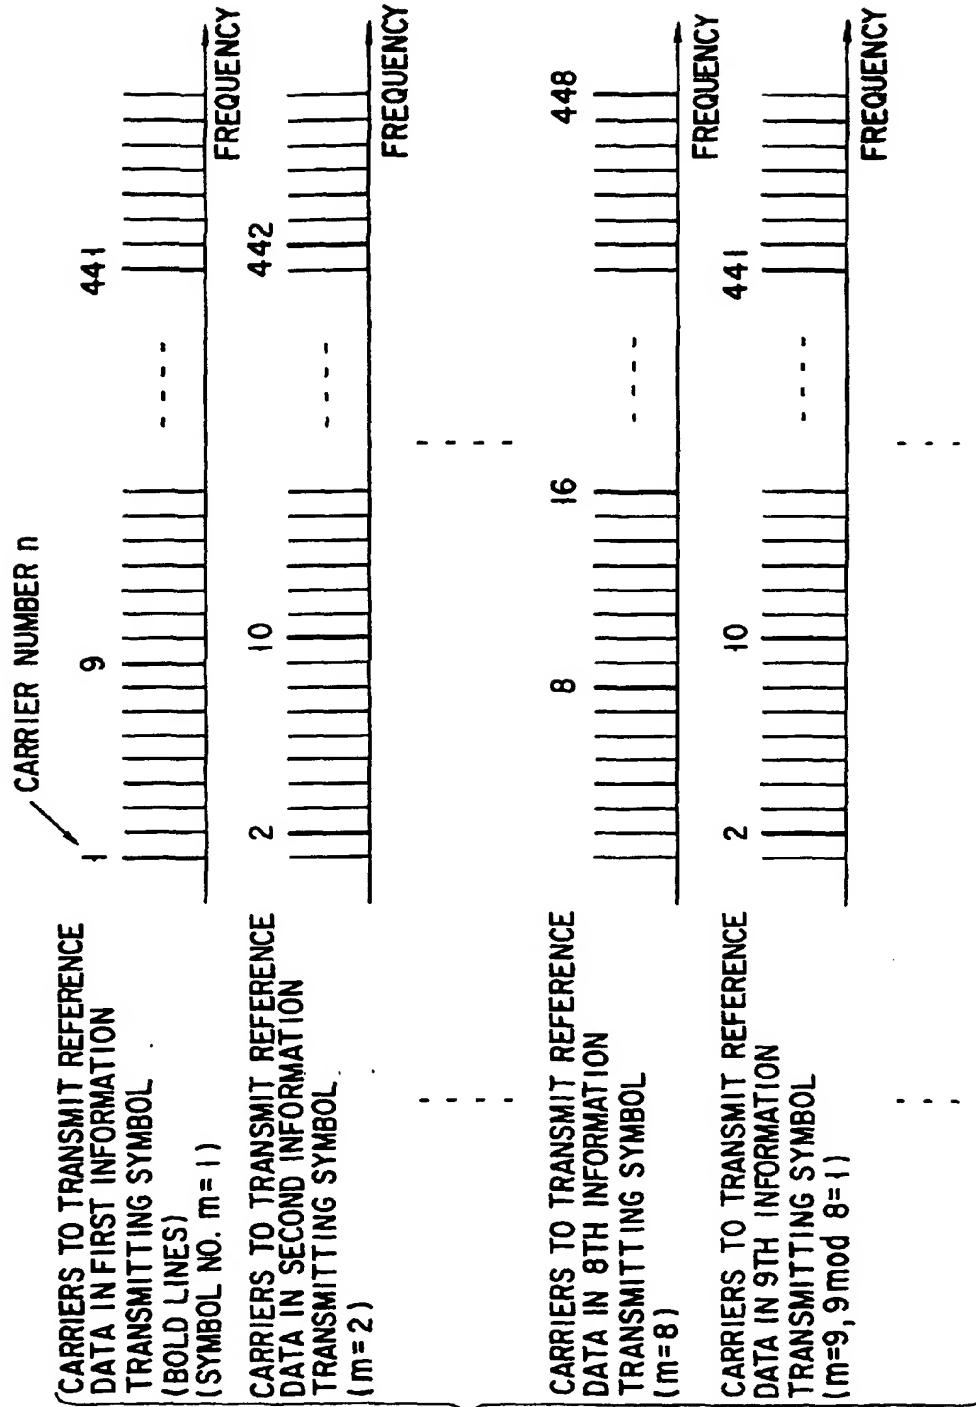

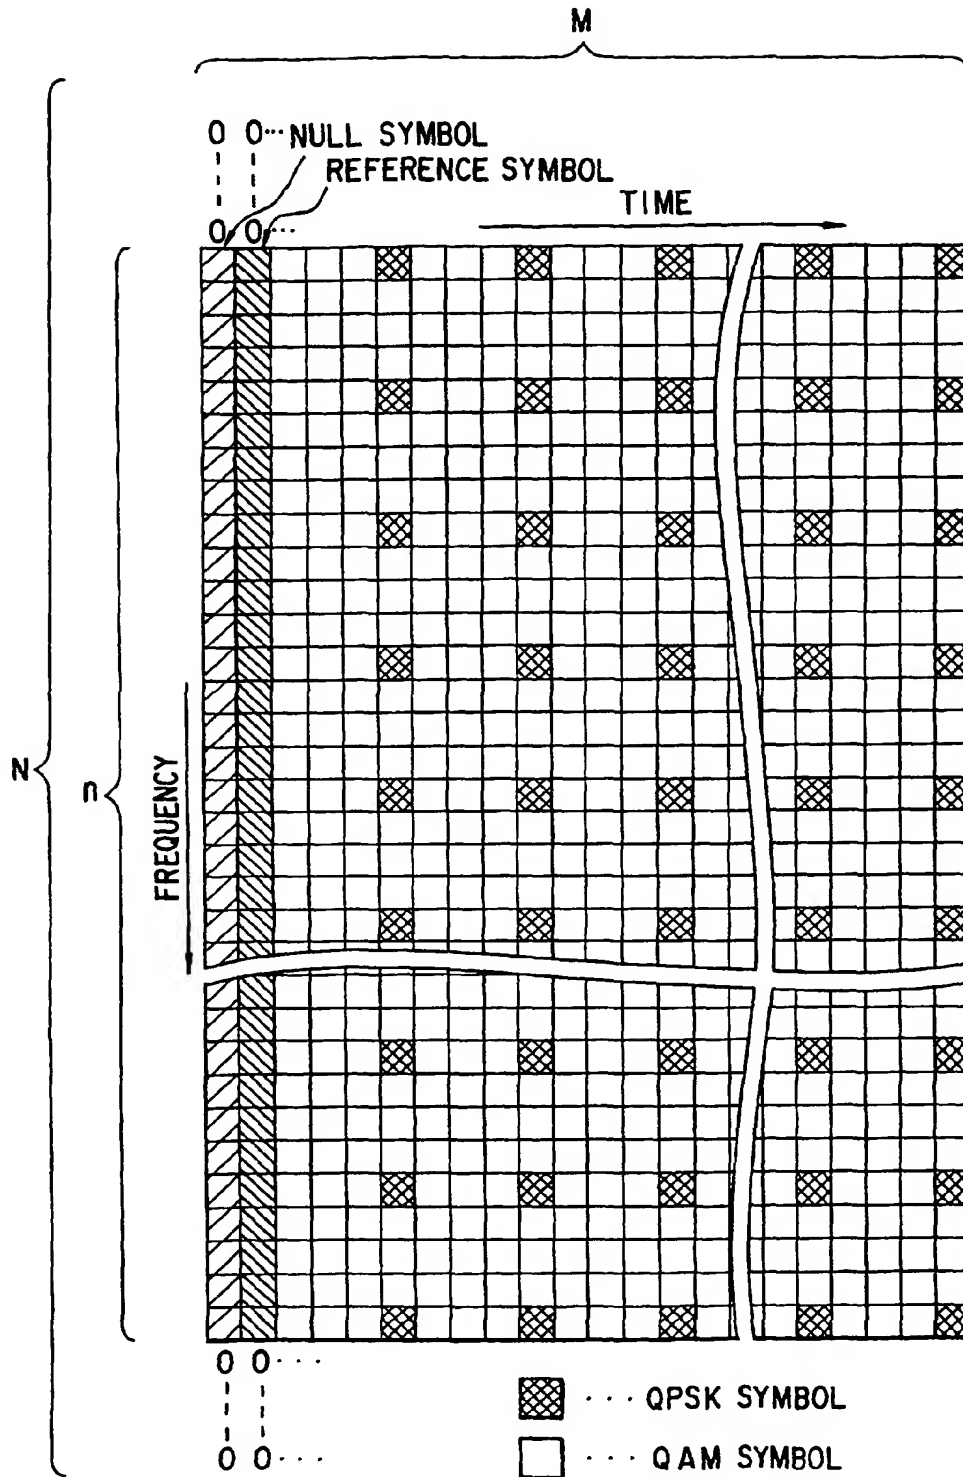


FIG. 2

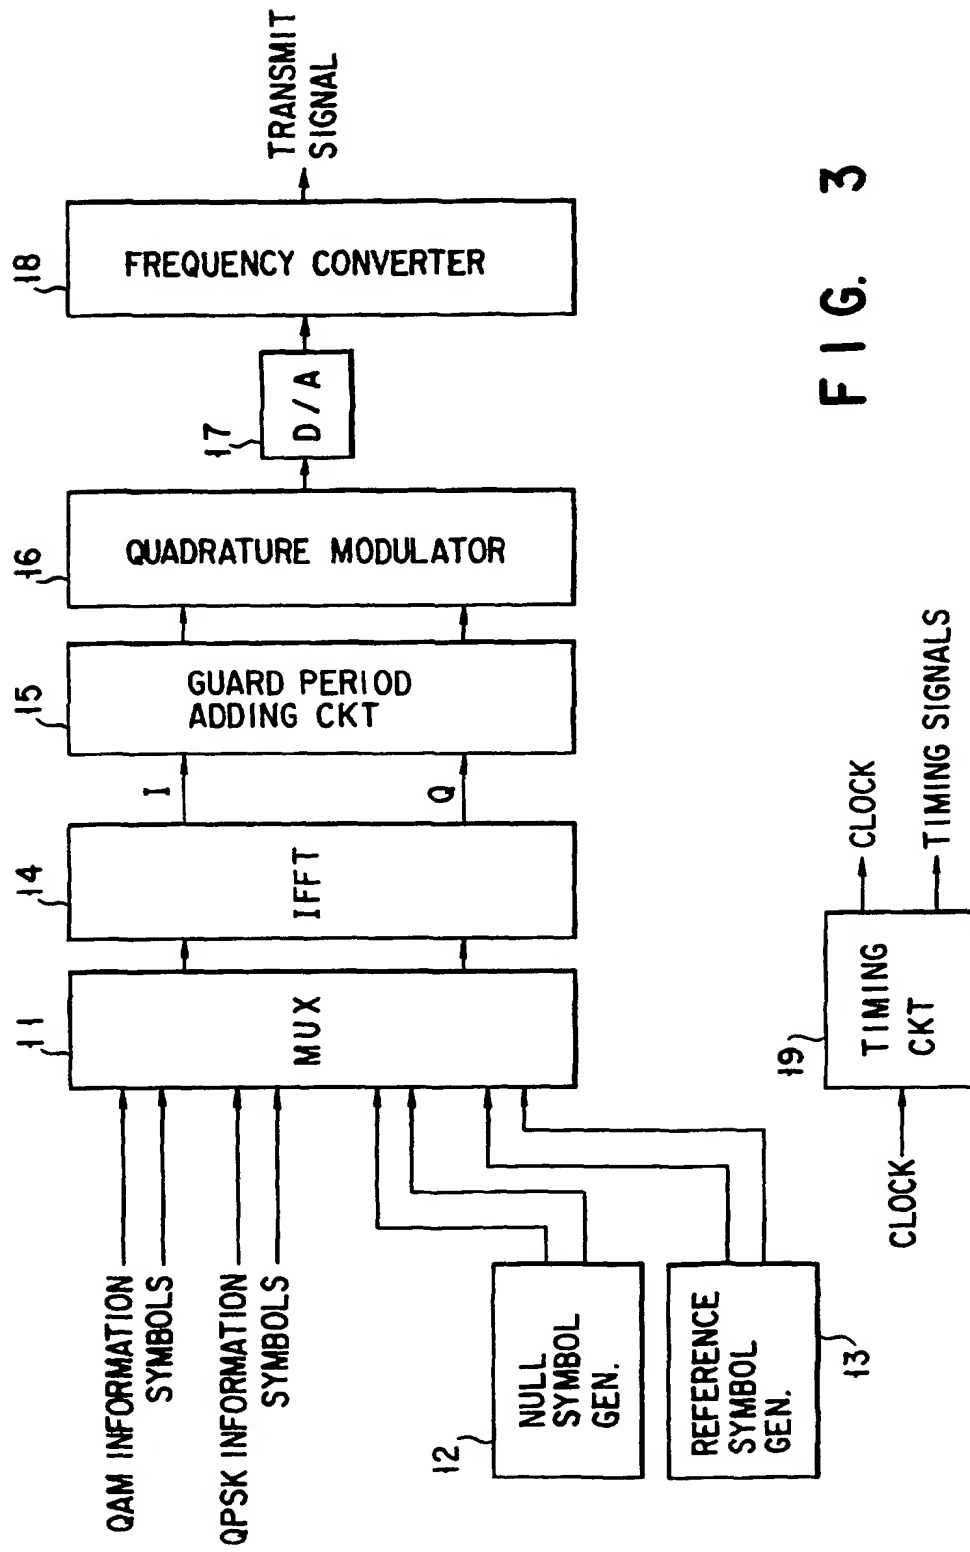


FIG. 3

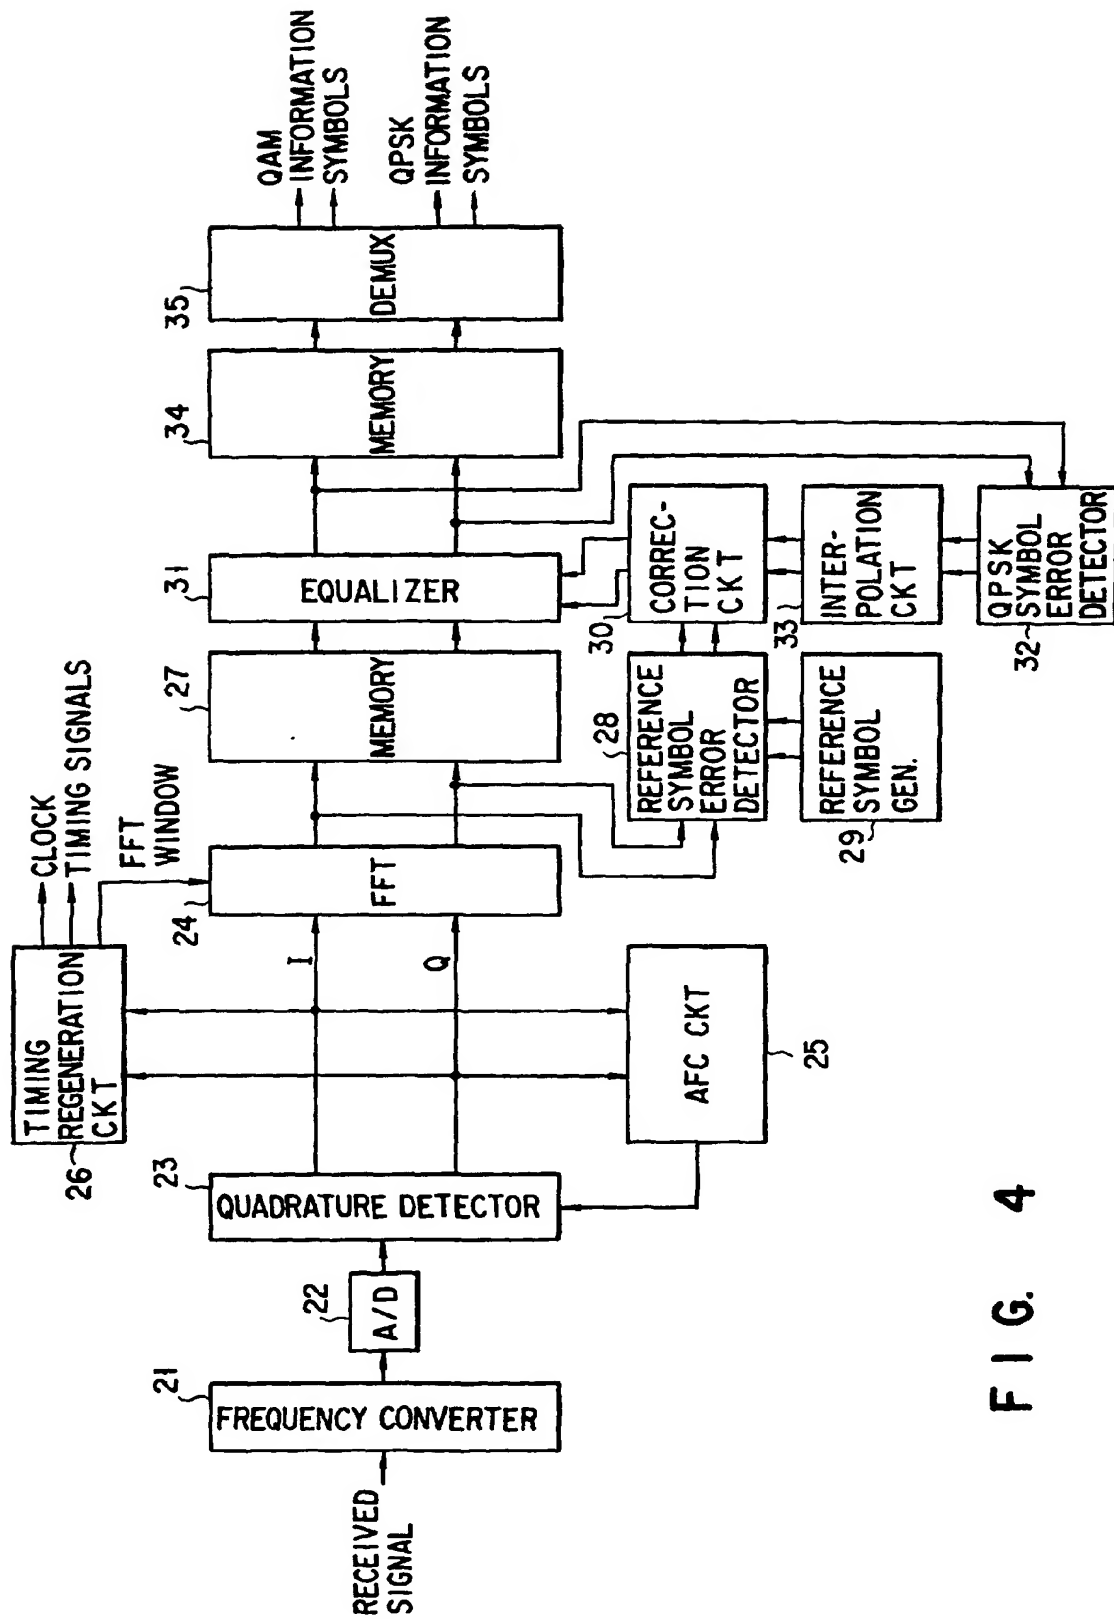


FIG. 4

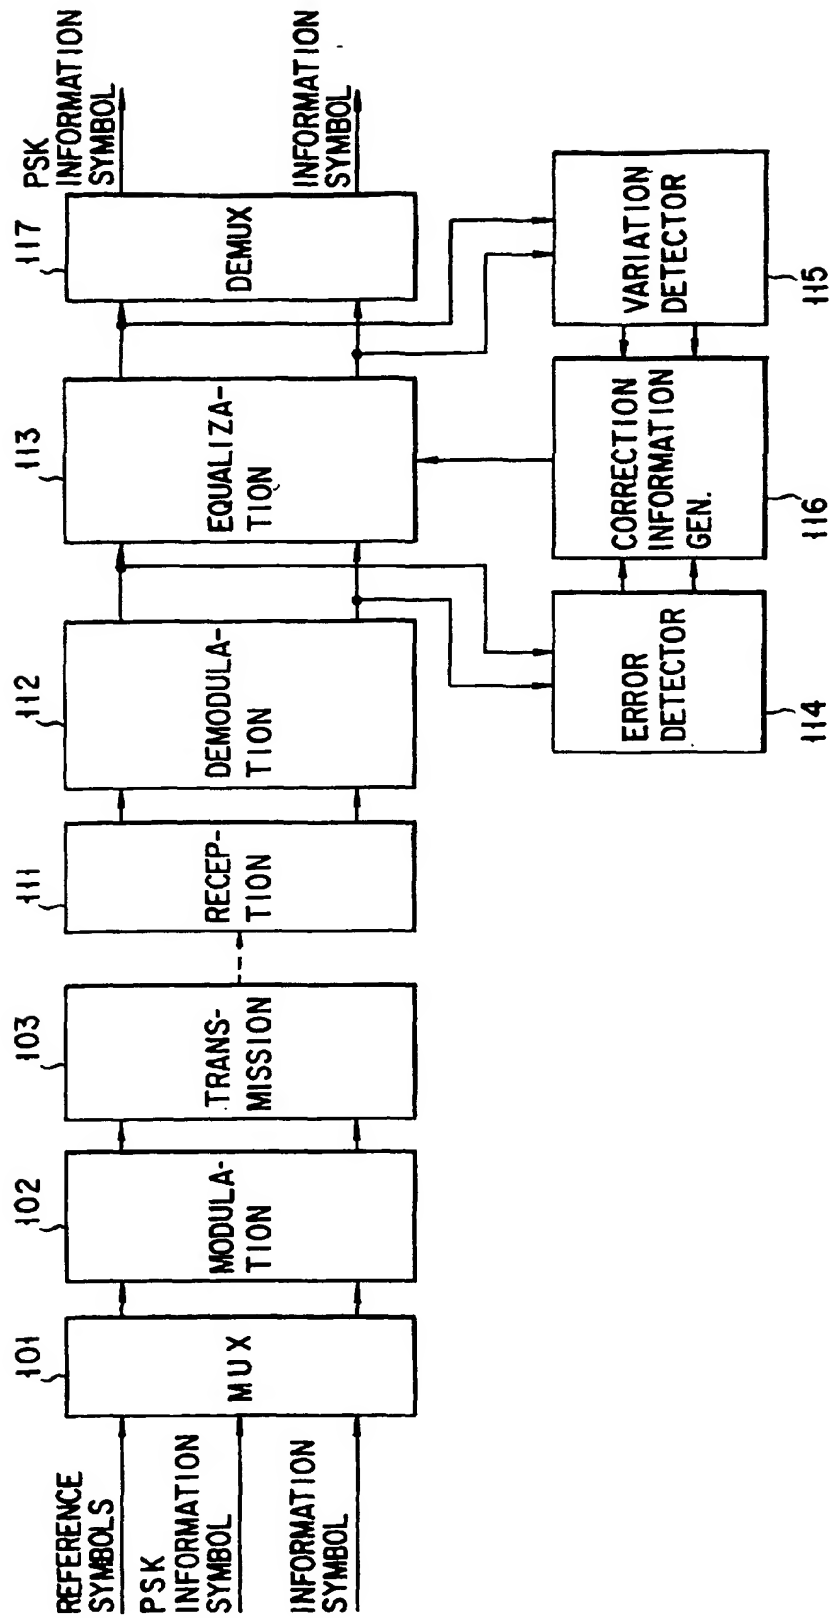


FIG. 5

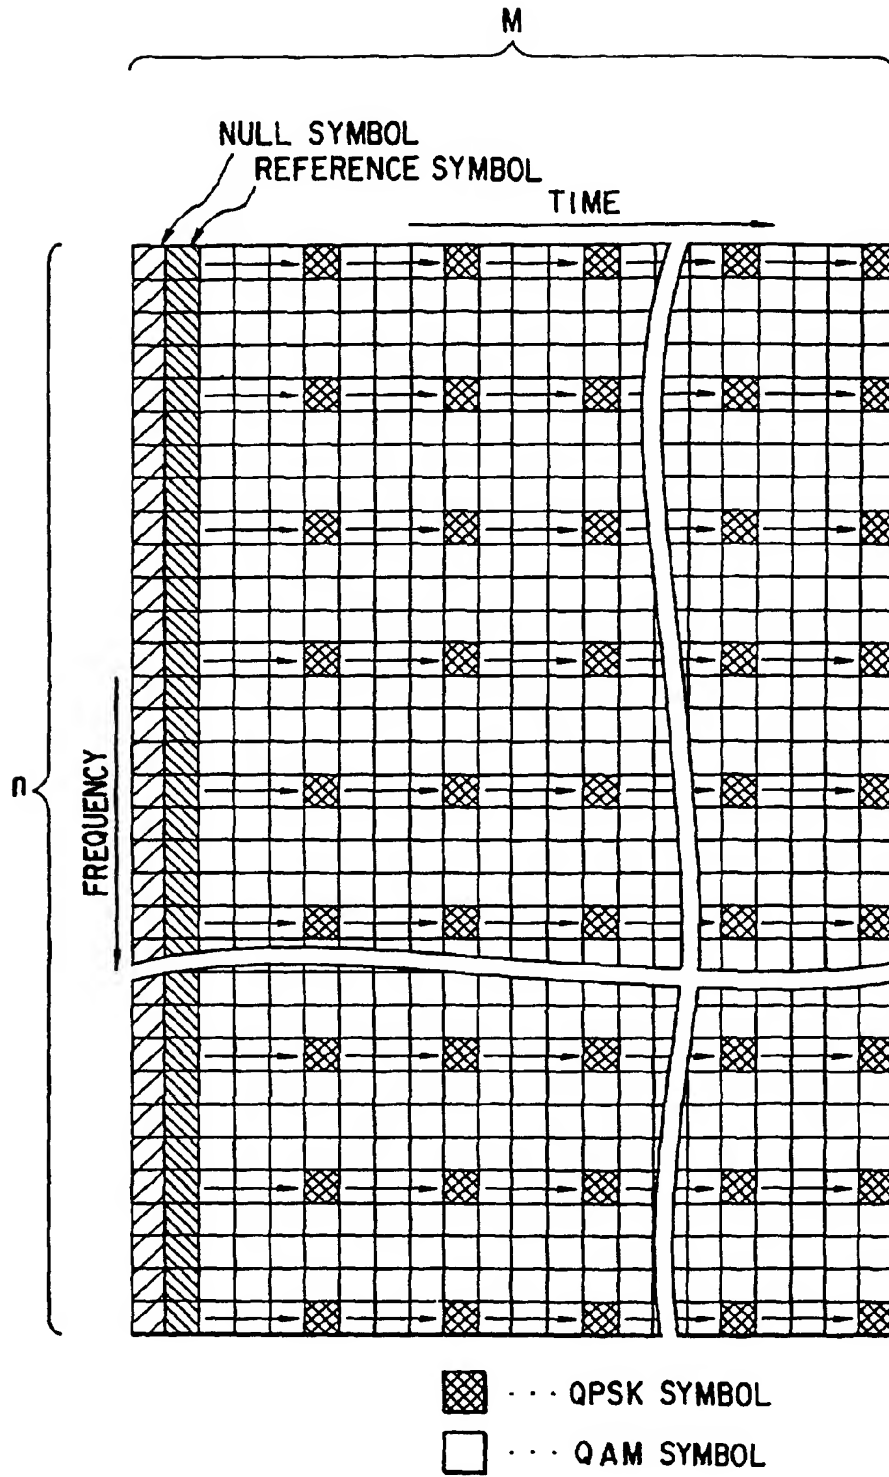


FIG. 6

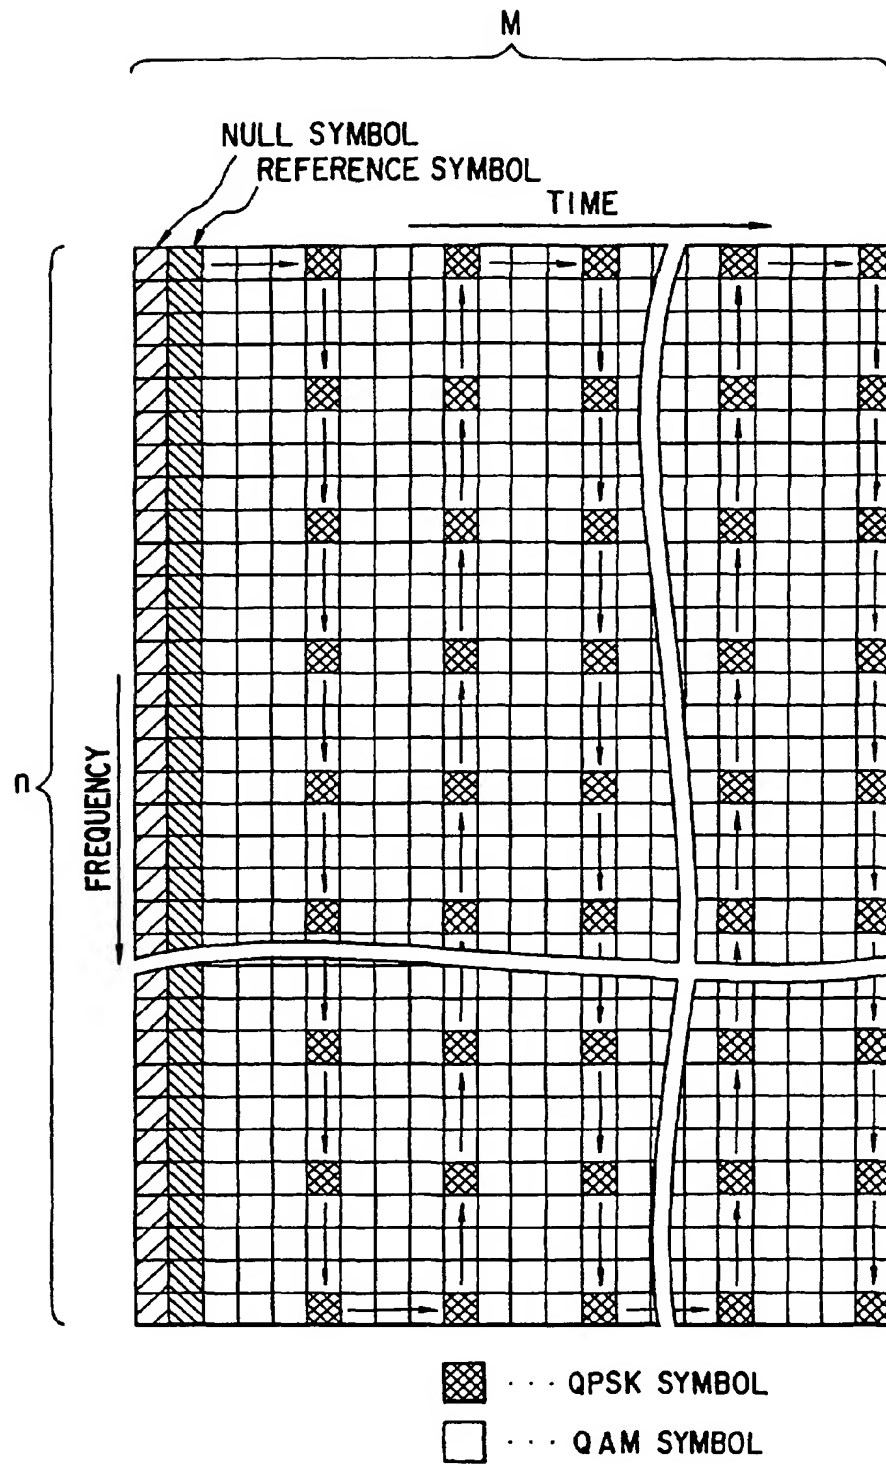


FIG. 7

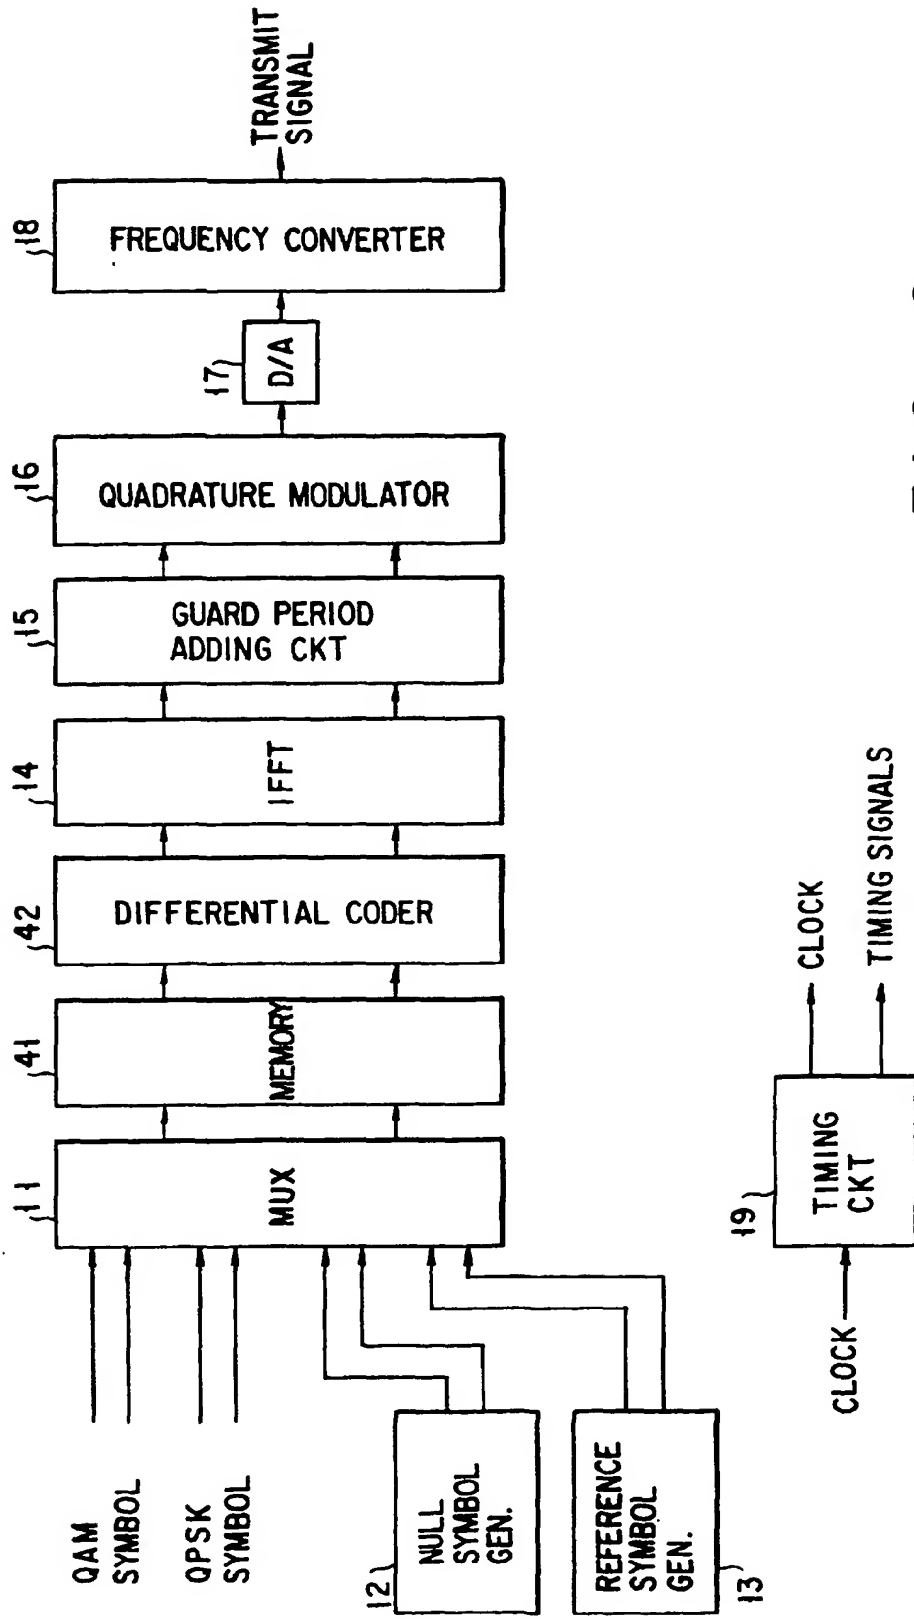


FIG. 8

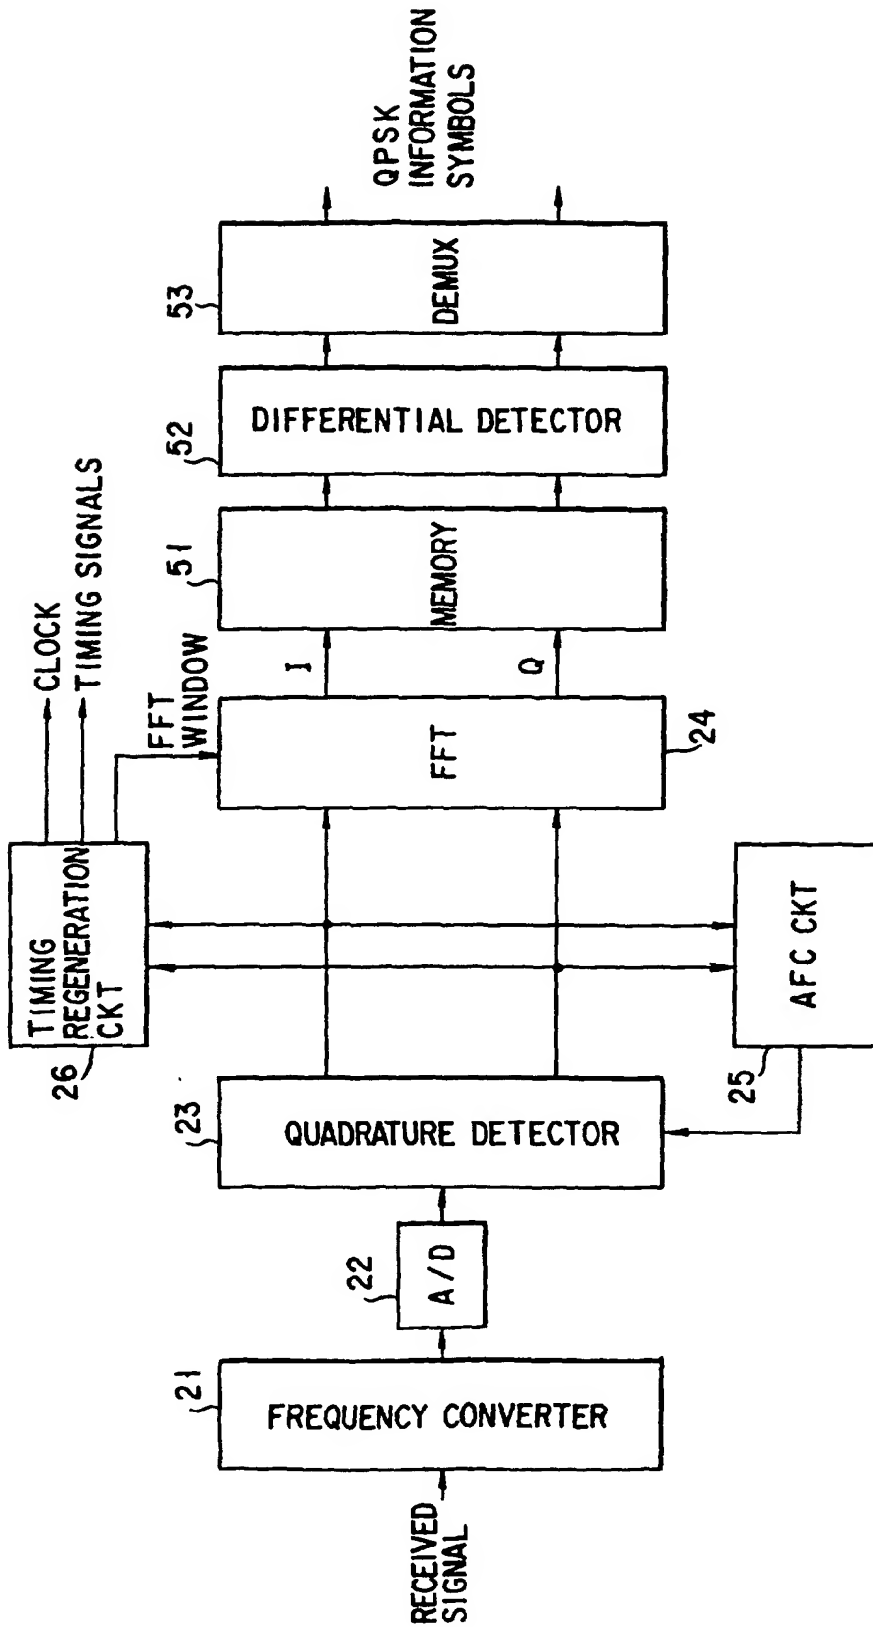


FIG. 9

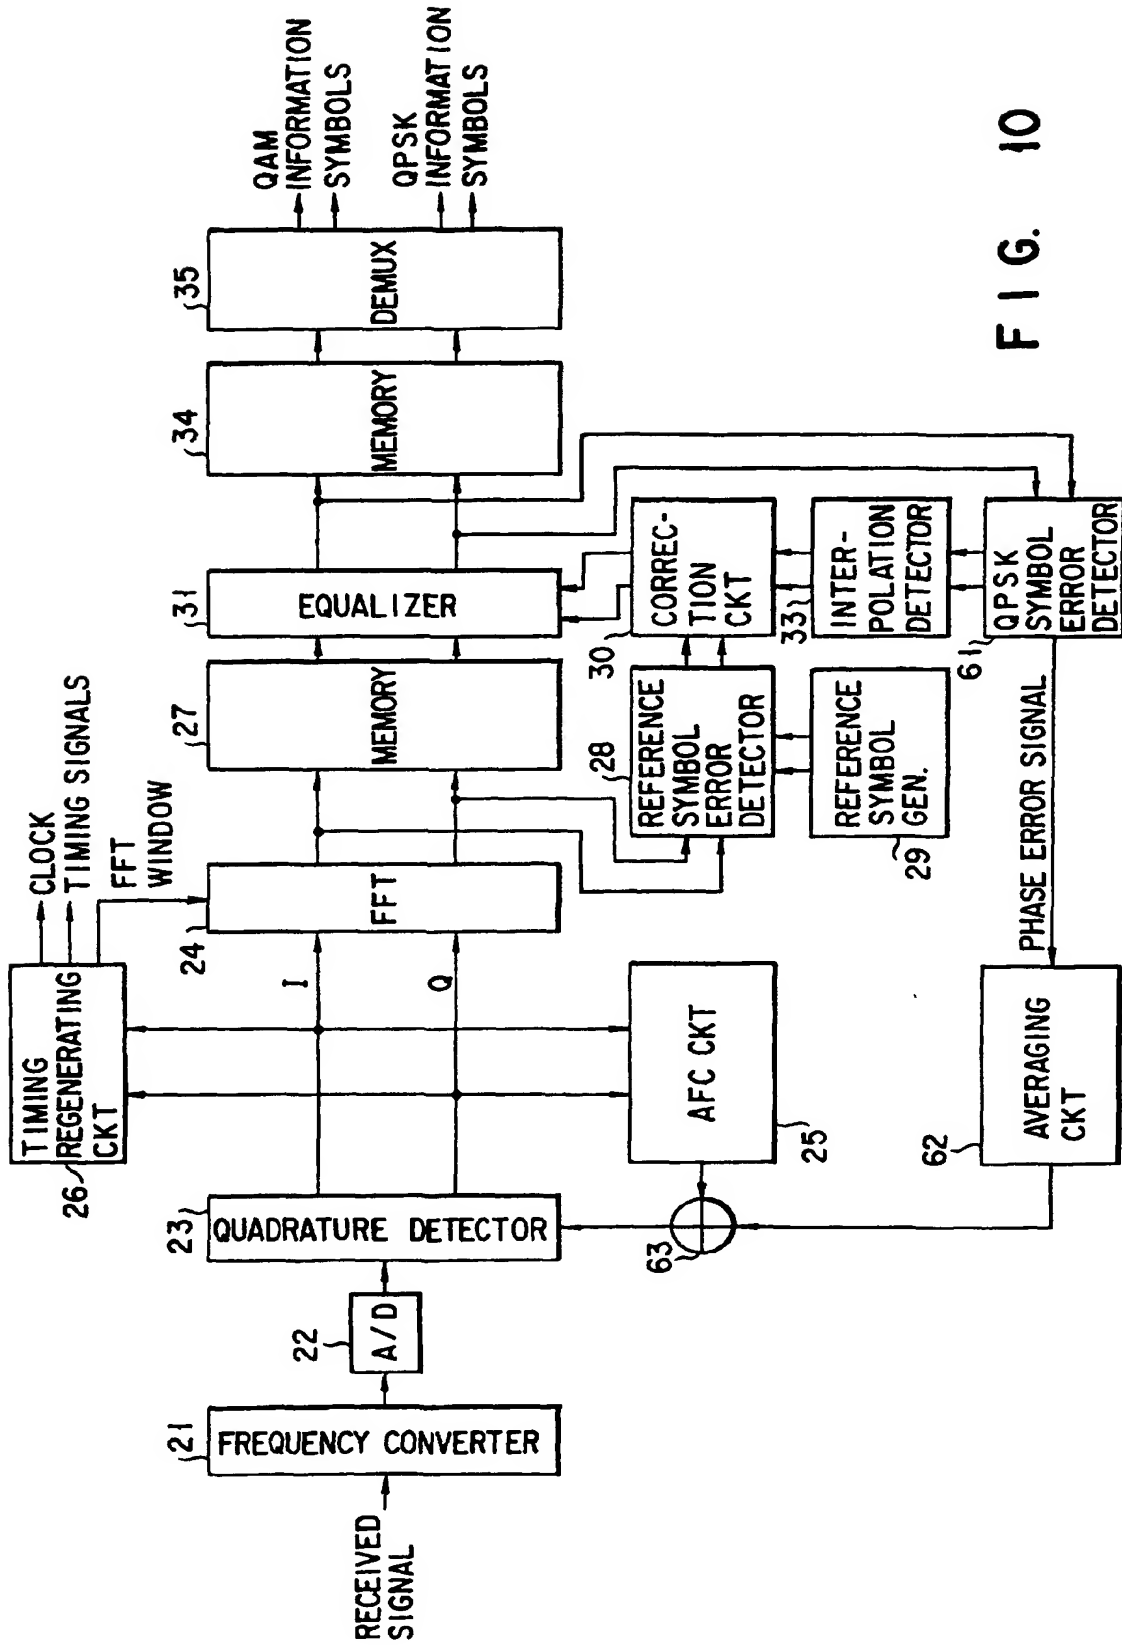


FIG. 10

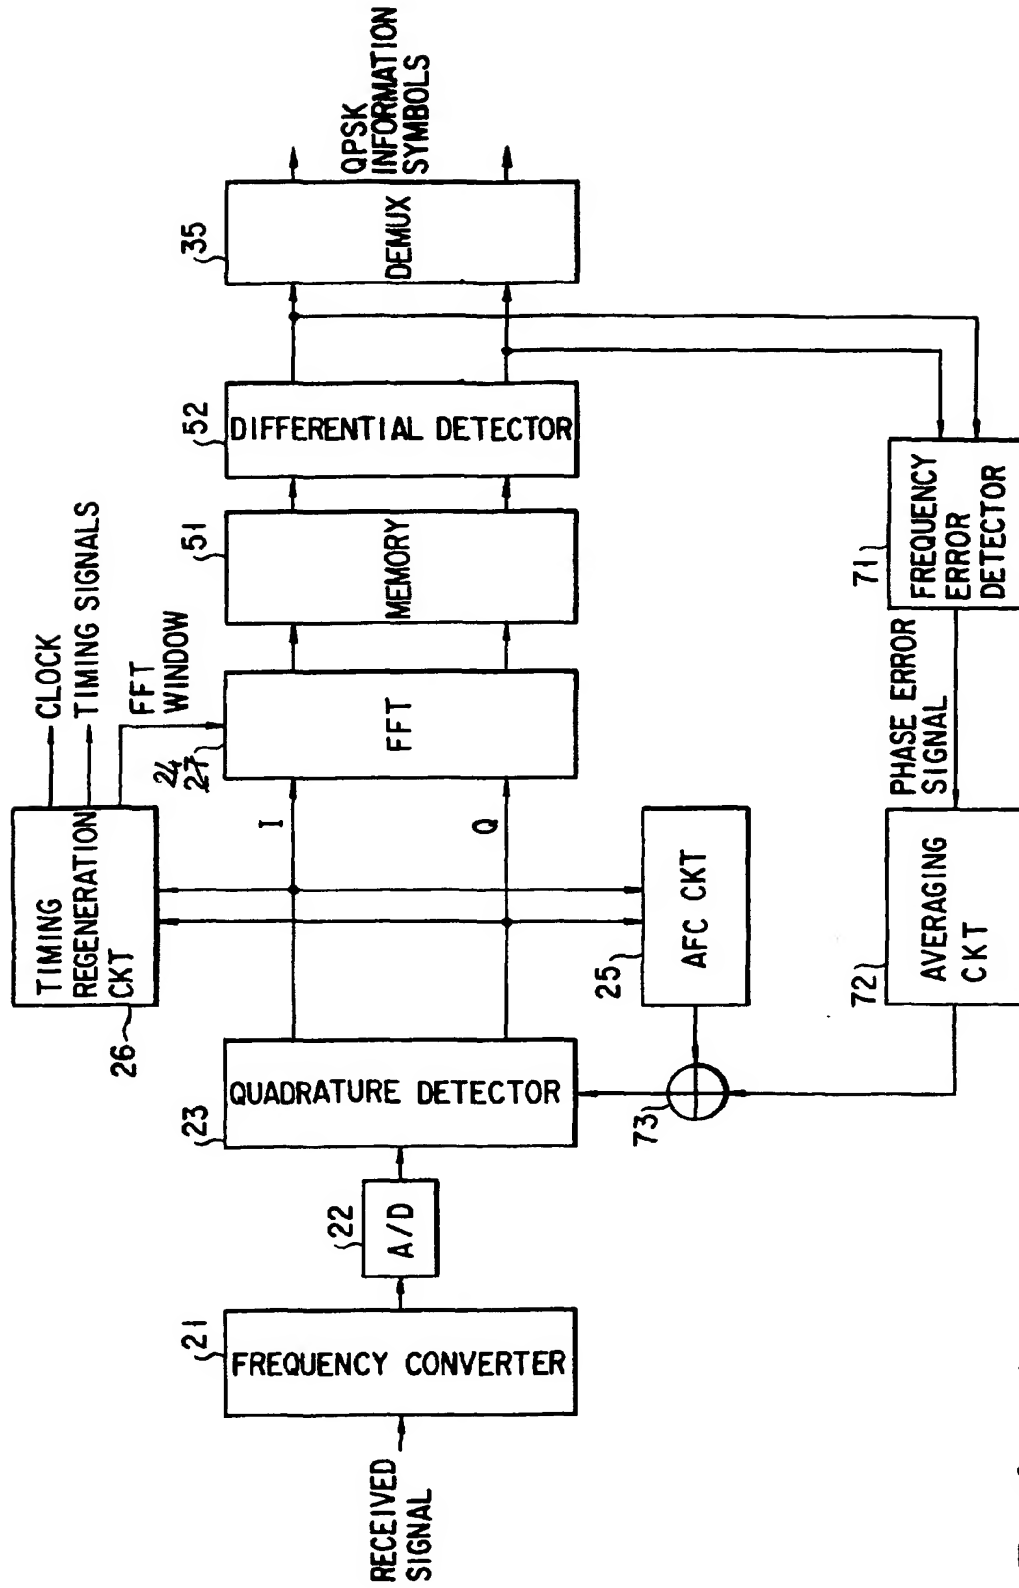


FIG. 11

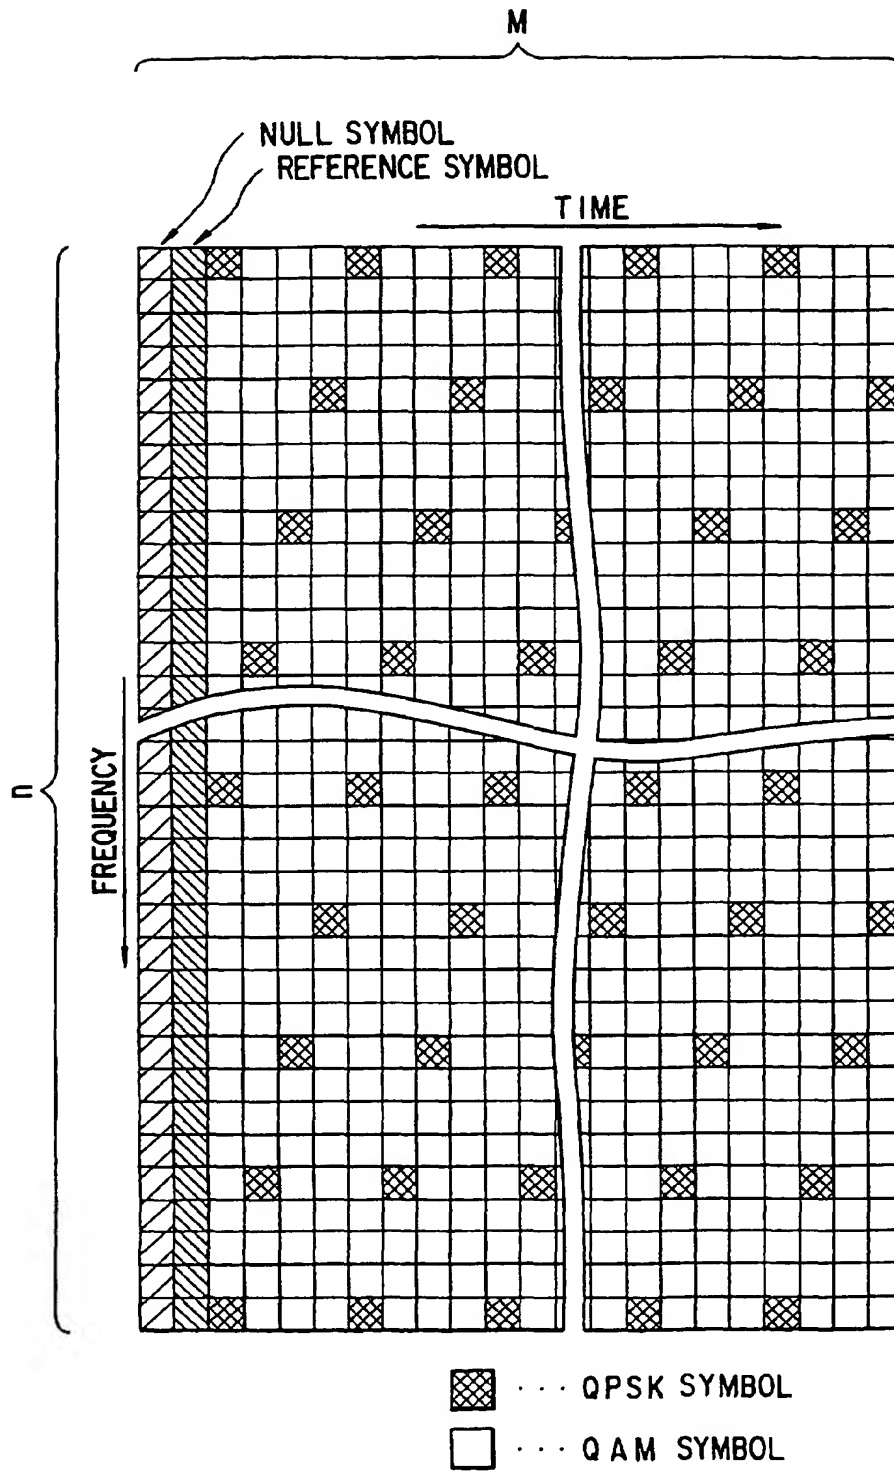


FIG. 12

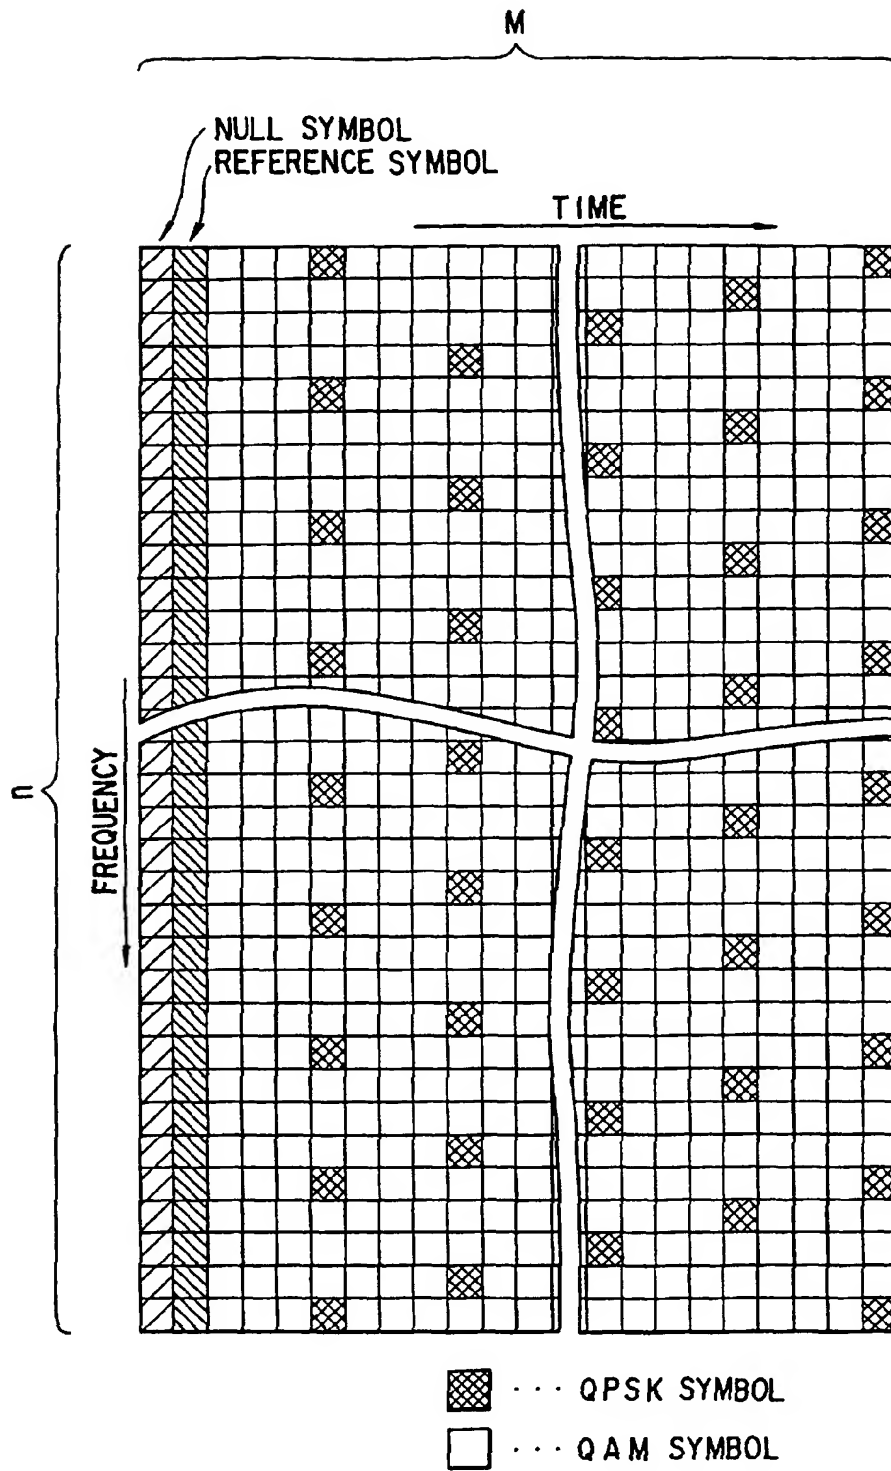


FIG. 13

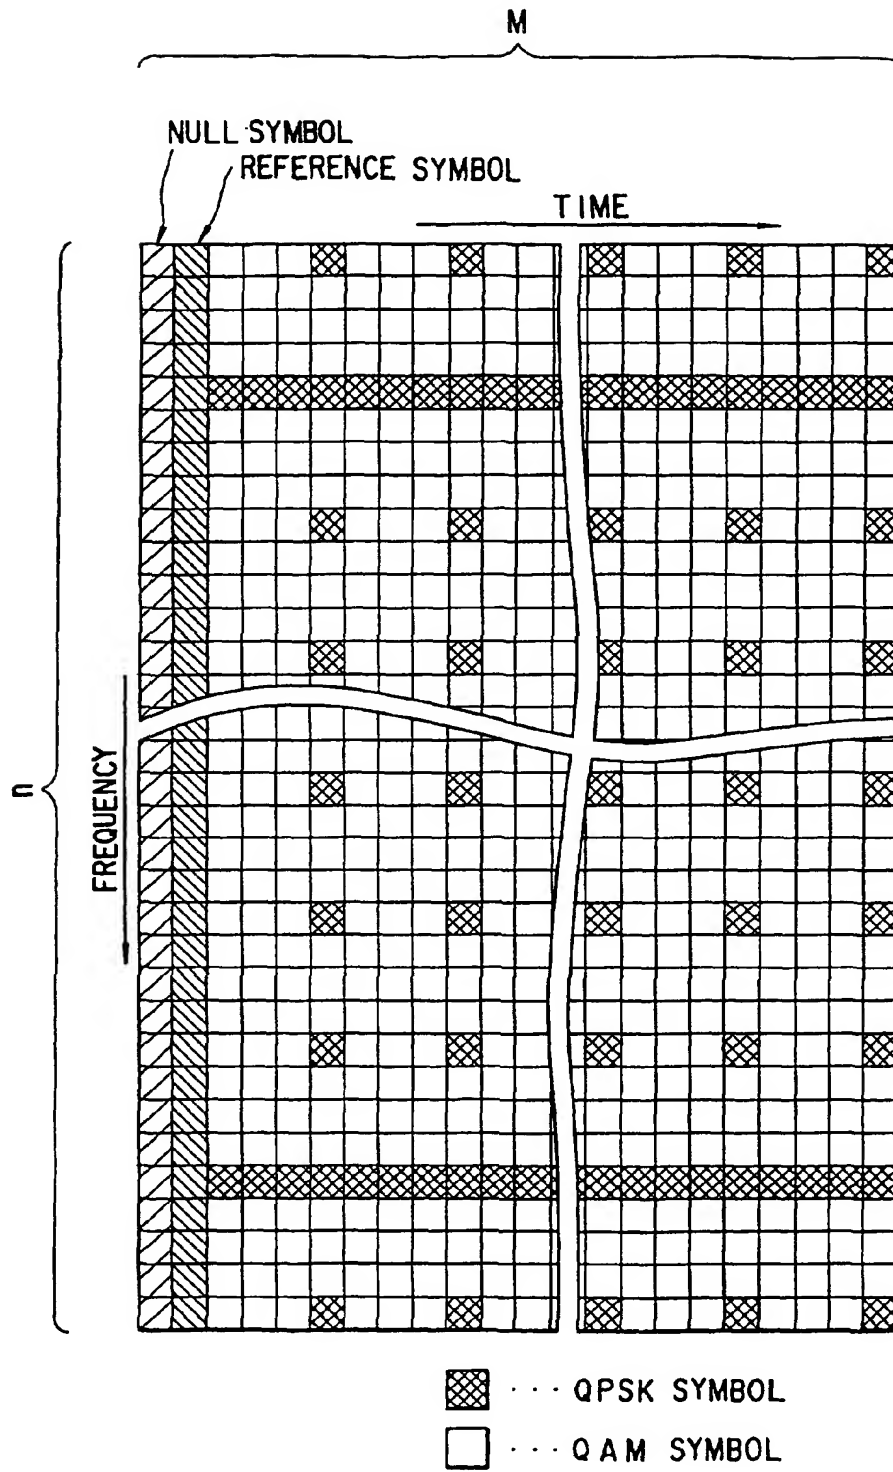


FIG. 14

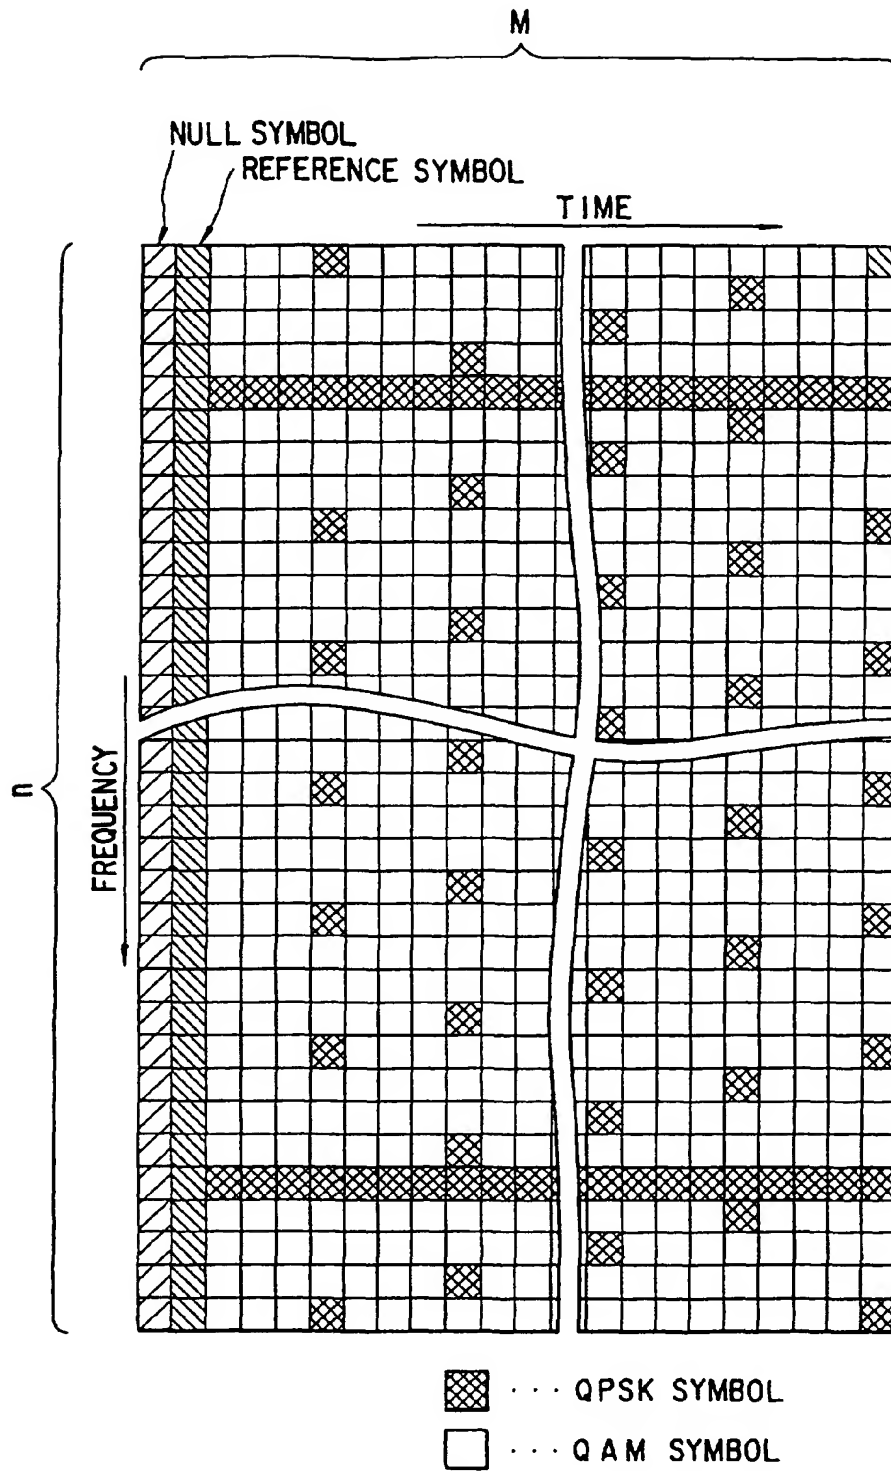


FIG. 15

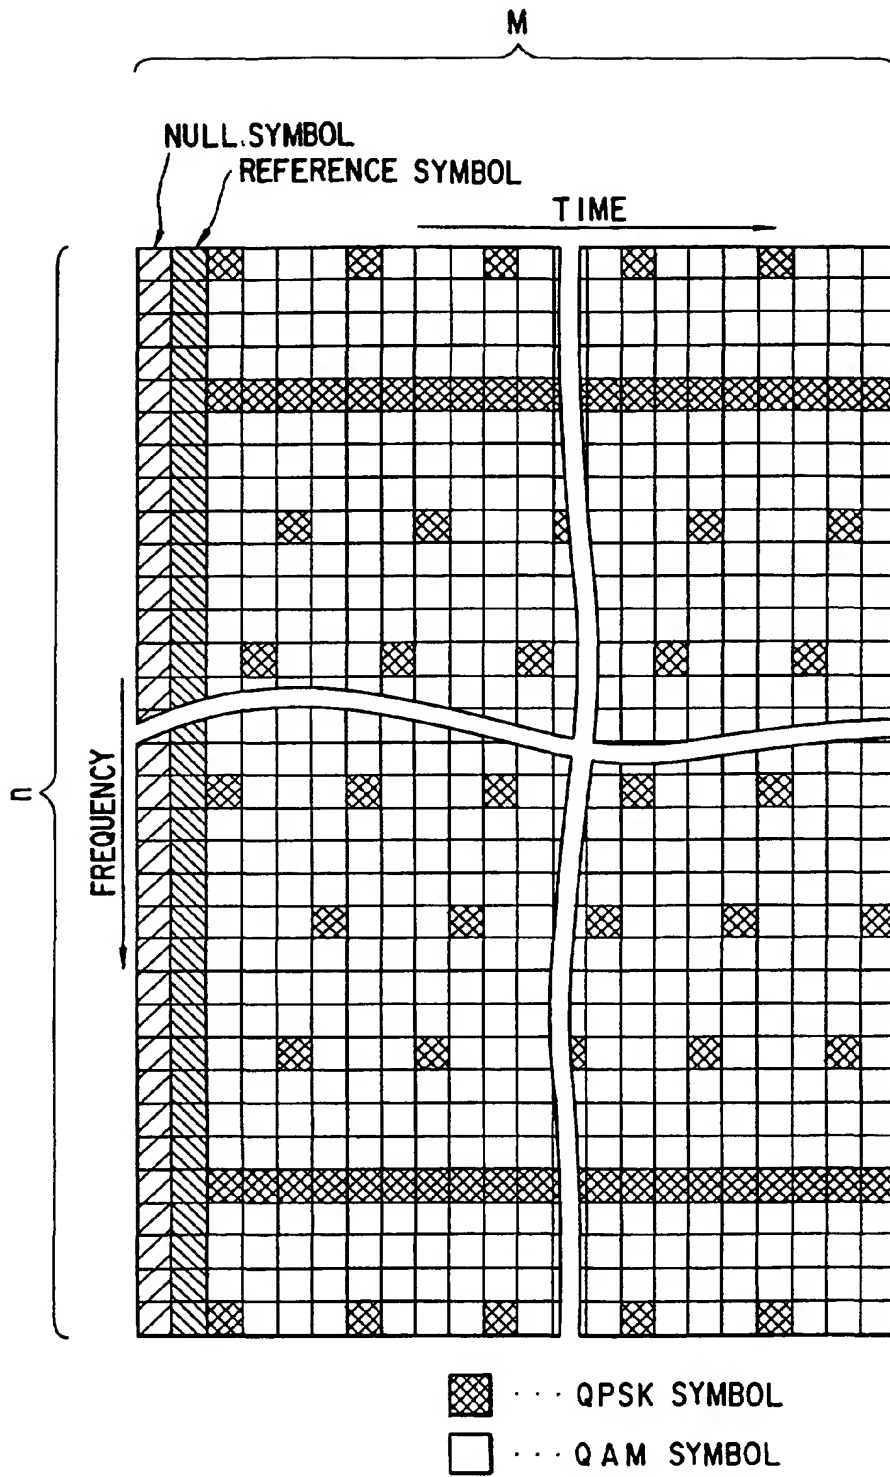


FIG. 16